

Journal of Mathematical Imaging and Vision
Robust model selection in 2D parametric motion estimation
--Manuscript Draft--

Manuscript Number:	
Full Title:	Robust model selection in 2D parametric motion estimation
Article Type:	Manuscript
Keywords:	robust model selection; parametric motion estimation; image sequence
Corresponding Author:	P. Bouthemy Inria Centre de Recherche Rennes Bretagne Atlantique Rennes Cedex,, FRANCE
Corresponding Author Secondary Information:	
Corresponding Author's Institution:	Inria Centre de Recherche Rennes Bretagne Atlantique
Corresponding Author's Secondary Institution:	
First Author:	P. Bouthemy
First Author Secondary Information:	
Order of Authors:	P. Bouthemy Bertha Mayela Toledo Acosta Bernard Delyon
Order of Authors Secondary Information:	
Funding Information:	

Robust model selection in 2D parametric motion estimation

Patrick Bouthemy · Bertha Mayela Toledo Acosta · Bernard Delyon

Received: date / Accepted: date

Abstract Parametric motion models are commonly used in image sequence analysis for different tasks. A robust estimation framework is usually required to reliably compute the motion model over the estimation support in presence of outliers, while the choice of the right motion model is also important to properly perform the task. However, dealing with model selection within a robust estimation setting remains an open question. We define two original propositions for robust motion model selection. The first one is an extension of the Takeuchi information criterion (TIC). The second one is built from the Fisher statistic. We also derive an interpretation of the latter as a robust Mallows' C_P criterion. Both robust motion model selection criteria are straightforward to compute. We have conducted a comparative objective evaluation on computer-generated image sequences with ground truth, along with experiments on real videos, for the parametric estimation of the 2D dominant motion in an image due to the camera motion. They demonstrate the interest and the efficiency of the proposed robust model selection methods.

1 Introduction

Resorting to 2D parametric models is a common practice in motion estimation, motion segmentation, image registration, and more generally in dynamic scene analysis. Video stabilization [24], video summarization [9], image stitching [38], motion detection [43], motion layer segmentation [8], optical flow computation [5, 10, 45], tracking [37, 46], action recognition and localization [16], crowd motion analysis [28], to name a few, all may rely on 2D polynomial motion estimation. A key issue then arises: how to choose the right motion model when adopting a robust estimation setting?

This problem is most often circumvented by settling for empirical choice. The affine motion model is for instance claimed as a good trade-off between efficiency and representativeness without any available information on the dynamic scene. However, a principled method is more powerful and satisfying to properly solve the motion model selection problem [11, 13, 41]

The most known statistical criteria for model selection are without doubt Akaike information criterion (AIC) [2], Bayesian information criterion (BIC) [36], or Takeuchi information criterion (TIC) [7]. Broadly speaking, it starts from the maximum likelihood, and amounts to add to the model fit, a weighted penalty term on the model complexity or dimension, e.g., given by the number of the model parameters. The definition of the weight depends on the statistical information criterion. The likelihood term accounts for a Gaussian distribution of the residuals involved in the regression issue. A comparative study of several of them is reported in [42] for classification in pattern recognition. Let us add the Mallows' C_P criterion [22] and the Minimum Description Length criterion (MDL) [30] respectively equivalent to AIC and BIC under certain hypotheses.

Patrick Bouthemy

Inria, Centre Rennes - Bretagne Atlantique, Campus de Beaulieu, 35042 Rennes cedex, France

E-mail: Patrick.Bouthemy@inria.fr

Bertha Mayela Toledo Acosta

Inria, Centre Rennes - Bretagne Atlantique, Campus de Beaulieu, 35042 Rennes cedex, France

E-mail: bertha-mayela.toledo-acosta@inria.fr

Bernard Delyon

University of Rennes 1, IRMAR, Campus de Beaulieu, 35042 Rennes cedex, France

E-mail: bernard.delyon@univ-rennes1.fr

1 Finally, let us mention the Akaike criterion with a cor-
 2 rection for finite sample sizes (AICc) [7].
 3

4 However, outliers are usually present whatever the
 5 motion estimation support, the entire frame or a more
 6 local one. It may be due to local independent motions,
 7 oclusions, or any local violation of the assumptions as-
 8 sociated with motion computation. Robust estimation
 9 [14, 15] is then required in many situations [5, 25, 27,
 10 37] to cope with the presence of outliers. Indeed, least-
 11 square estimation finds oneself biased in these cases. As
 12 a consequence, the aforementioned information criteria
 13 involving a quadratic (i.e., Gaussian) likelihood term
 14 are no more exploitable as they stand. Model selection
 15 must be revisited in the context of the robust estima-
 16 tion setting.
 17

18 So far, combining model selection and robust esti-
 19 mation for parametric motion computation has rarely
 20 been investigated [41]. In this paper, we propose two
 21 different statistical criteria for robust motion model se-
 22 lection. The first one is an extension of the Takeuchi
 23 information criterion (TIC). The second one tackles
 24 this problem from a different perspective based on the
 25 Fisher statistic. An interpretation as a robust version
 26 of the Mallows' C_P criterion [22] is also provided.
 27

28 We need a use case to validate the proposed meth-
 29 ods in real situations. We want to handle a single-model
 30 fitting task, so that we can focus on the robust model
 31 selection problem. We take the task of estimating the
 32 global (or dominant) motion in the image due to the
 33 camera motion for a shallow scene, which is of primary
 34 interest for many applications, e.g., video stabilization
 35 or action recognition. In that context, the dominant
 36 motion in the image can be represented by a 2D para-
 37 metric motion model. Indeed, this task is merely an
 38 estimation problem in presence of outliers constituted
 39 by the independently moving objects in the scene. It is
 40 not interwoven with other involved issues as in motion
 41 detection, motion segmentation or object tracking. On
 42 the other hand, the multiple-model fitting issue inves-
 43 tigated in [21, 39, 40] is a different problem. The goal is
 44 to fit multiple instances of a given type of model over
 45 (unknown) subsets of data. These works do not address
 46 the selection of the motion model type.
 47

48 We described a preliminary version of this work in
 49 the short conference paper [6]. The present paper is a
 50 significant extension of the latter. We have added sev-
 51 eral contributions: a new criterion -the robust TIC-, im-
 52 provements of the Fisher-based criterion, an augmented
 53 related-work section, a revisited objective comparative
 54 evaluation, more experiments on real videos.
 55

56 The remainder of the paper is organized as follows.
 57 Section 2 is devoted to related work and positioning of
 58 our approach. In Section 3, we recall a classical robust
 59

estimation method of 2D motion models, and formu-
 late the model fit. Section 4 describes our first robust
 motion model selection method called Robust Takeuchi
 Information Criterion (RTIC). In Section 5, we present
 our second original method for robust motion model se-
 lection, called Fisher-based robust information criterion
 (FRIC). Objective comparisons on computer-generated
 examples with ground-truth are reported in Section 6,
 along with experiments on real videos, to assess the
 performance of our two criteria. Concluding remarks
 are given in Section 7.

2 Related work and positioning

2.1 Review of related research

Statistical information criteria have been exploited in
 computer vision for years [13], sometimes with spe-
 cific formulations and characteristics. Geometric coun-
 terparts of AIC and MDL, respectively termed GAIC
 and GMDL, were proposed in [18] to take into account
 a different formulation of model fitting along with the
 dimension of the manifold involved in a 3D geometric
 transformation. AIC and BIC were tested in [11] for
 2D affine motion model classification, but they were
 experimentally proven less efficient than a succession of
 hypothesis tests deciding in turn on the non-zero pa-
 rameters of the affine motion model. Indeed, AIC tends
 to overestimate the complexity of the underlying model.
 In [44], the most appropriate model among 2D poly-
 nomial motion models for motion estimation from normal
 flows, was selected with a penalization factor given by
 the Vapnik's measure; the resulting algorithm was fa-
 vorably compared to AIC, BIC and generalized cross-
 validation. In [35], a MDL-based criterion was designed
 for model selection in 3D multi-body structure-and-
 motion from images. A MDL principle is also adopted in
 [23] for non rigid image registration. On the other hand,
 the small-sample-size corrected version of Akaike in-
 formation criterion (AICc) was used in [4] for a pixel-wise
 motion model selection with a view to crowd motion
 analysis in video sequences.

Robust model selection on its own was explored in
 the robust statistics literature along several directions
 [1, 19, 26, 29, 31, 34]. In [31], a robust extension of AIC
 (RAIC), was defined, coming up with substituting a
 general robust estimator ρ of the model parameters θ
 for the maximum likelihood estimator. M-estimators
 are incorporated in BIC and the asymptotic perfor-
 mance is studied in [20]. A special case is the use of the
 Huber robust function [15], leading to the RBIC crite-
 rion. The Mallows' C_P criterion is revisited in [32] to

yield a robust version. The generalized information criterion (GIC), described in [19], can be applied to evaluate statistical models constructed by other procedures than maximum likelihood, such as robust estimation or maximum penalized likelihood.

In contrast, to the best of our knowledge, very few similar investigations have been undertaken regarding motion analysis in image sequences. In [3], the authors designed a global energy function for both the robust estimation of mixture models and the validation of a MDL criterion. The overall goal is to get a layering representation of the moving content of an image sequence. The MDL encoding acts on the overall cost of the representation comprising the number of layers, residuals and motion parameters. However, the primary purpose was parsimonious motion segmentation, and not motion model selection on its own. In [41], a robust extension of the Geometric Information Criterion (GIC) [17], termed GRIC, is proposed in the vein of RAIC. It was applied to the selection of the 3D geometric transformation attached to a rigid motion and estimated through the matching of image interest points. Geometrical and physical constraints are also explored in [12] for image motion segmentation, with the so-called surface selection criterion (SSC) primarily designed by the authors for range data segmentation. Better performance is reported than with several information criteria, but the use of SSC here is comparable to a regularization approach.

2.2 Our approach

Yet, in computer vision and in particular in dynamic scene analysis, for instance when estimating the global image motion, the concern is not only to select the best model, but also to get the largest possible inlier set. Selecting a simple global motion model that only fits the apparent motion of a too limited part of the static scene is not appropriate. The size of the inlier set must be properly taken into account in the robust model selection criterion.

The problem of robust motion model selection is then three-fold: *i*) maximizing the motion model fit to the data, *ii*) penalizing the motion model complexity, *iii*) accounting for the largest possible set of inlier points in the estimation support. Indeed, the two latter ones must be simultaneously satisfied, which might be contradictory. By definition, this is an issue specific to robust model selection. It apparently did not draw interest in the robust statistics literature, while it is of key importance in motion analysis. In this paper, we introduce two robust motion model selection methods

in that perspective. In addition, the second method follows a novel approach based on Fisher statistic.

To make the robust motion model selection problem concrete, we will deal with the dominant image motion estimation issue. The dominant (or global) image motion is usually due to the camera motion, and then corresponds to the background motion, i.e., the apparent motion of the static scene in the image sequence. Computing the dominant motion has many important applications such as video stabilization, background subtraction in case of a free moving camera, action recognition, image stitching, and image registration in general. Of course, the proposed framework could be applied to other issues as well, for instance to select the right motion model in each image region for motion layer segmentation.

3 Robust motion model estimation

First, we briefly recall the main principles of the robust estimation of parametric motion models. The estimation process relies on the brightness constancy assumption, and is embedded in a coarse-to-fine scheme to handle large displacements. We will present it in the frame of the motion model computation over the whole image domain Ω , but it can be straightforwardly adapted to the computation of the motion model over a given area in the image. Then, we will define the motion model fit for the estimated motion model parameters. Finally, we will describe the set of 2D parametric motion models that will be considered, appertaining to the category of polynomial models.

3.1 Computation of motion model parameters

We consider a set of 2D polynomial motion models. They will be precisely defined in Section 3.3 and Table 1. Let θ_m denote the parameters of model m , that is, the polynomial coefficients for the two components of the velocity vector. Parameters of the full model will be denoted by θ_M , if we have M models to test. $\mathbf{w}_{\theta_m}(p)$ is the velocity vector supplied by the motion model m at point $p = (x, y)$ of the image domain Ω .

We exploit the usual brightness constancy assumption [10] to estimate the parameters of the motion model. It leads to the linear regression equation relating the motion model parameters, through the velocity vector, and the space-time derivatives of the image intensity I :

$$\nabla I(p) \cdot \mathbf{w}_{\theta_m}(p) + I_t(p) = 0. \quad (1)$$

Motion model	Dimension	Mathematical expression
Translation (T)	2	$\mathbf{w}_\theta = (a_1, a_4)^T$
Pan-tilt (PT)	2	$\mathbf{w}_\theta(p) = (a_1 + a_1x^2 + a_4xy, a_4 + a_1xy + a_4y^2)^T$
Translation + Rotation (TR)	3	$\mathbf{w}_\theta(p) = (a_1 + a_3y, a_4 - a_3x)^T$
Translation + Scale (TS)	3	$\mathbf{w}_\theta(p) = (a_1 + a_2x, a_4 + a_2y)^T$
Translation + Rotation + Scale (TRS)	4	$\mathbf{w}_\theta(p) = (a_1 + a_2x + a_3y, a_4 - a_3x + a_2y)^T$
Full affine (FA)	6	$\mathbf{w}_\theta(p) = (a_1 + a_2x + a_3y, a_4 + a_5x + a_6y)^T$
Planar surface rigid motion (PSRM)	8	$\mathbf{w}_\theta(p) = (a_1 + a_2x + a_3y + a_7x^2 + a_8xy, a_4 + a_5x + a_6y + a_7xy + a_8y^2)^T$
Full quadratic (FQ)	12	$\mathbf{w}_\theta(p) = (a_1 + a_2x + a_3y + a_7x^2 + a_8xy + a_9y^2, a_4 + a_5x + a_6y + a_{10}x^2 + a_{11}xy + a_{12}y^2)^T$

Table 1 Set of 2D polynomial motion models

Let us denote $r_{\theta_m}(p)$ the left member of (1). The robust estimation of the motion model parameters can be defined by:

$$\hat{\theta}_m = \arg \min_{\theta_m} \sum_{p \in \Omega} \rho(r_{\theta_m}(p)), \quad (2)$$

where ρ denotes any robust penalty function. To quote a few examples of penalty function among M-estimators, the Lorentzian function is used in [5], whereas the Hampel estimator is preferred in [37], and the Tukey's function is adopted in [27].

Equation (1) is in fact the linearization of the more general constraint $I(p + \mathbf{w}_{\theta_m}(p)) - I(p, t) = 0$. As a consequence, it only holds for small displacements. A usual way to overcome this problem, is to resort to a coarse-to-fine scheme based on image multi-resolution and incremental motion estimation [10]. The minimization of (2) is achieved by an iterative algorithm, the Iterated Reweighting Least Squares (IRLS) method [14]. The IRLS method iteratively updates weights at every point $p \in \Omega$. The weights express the influence of each point p in the estimation of the motion model parameters. These weights can be further exploited to determine the inlier set associated with the estimated motion model m .

3.2 Motion model fit

Once we compute an estimate $\hat{\theta}_m$ of the motion model parameters, we get the residuals $r_{\hat{\theta}_m}(p)$, for all $p \in \Omega$, measuring the discrepancy between the input data and the estimated motion model. To evaluate how the estimated motion model fits the input data over the associated inlier set, we consider the residual sum of squares (RSS) obtained for the robustly estimated parameters $\hat{\theta}_m$ of the motion model m , given by:

$$\text{RSS}_m = \sum_{p \in \mathcal{I}_m} r_{\hat{\theta}_m}^2(p), \quad (3)$$

where \mathcal{I}_m represents the set of inliers associated with the estimated motion model m . The way the inlier set

is computed will be further explained in Section 5.1. The residual is formally defined by:

$$r_{\hat{\theta}_m}(p) = I(p + \mathbf{w}_{\hat{\theta}_m}(p), t + 1) - I(p, t), \quad (4)$$

knowing that the left member of (1) is a linearized version of (4) as aforementioned.

We compute RSS_m on the inlier set \mathcal{I}_m and not on the overall domain Ω , to obtain the model fit evaluation precisely on the subset of points whose motion conforms to the estimated motion model.

Furthermore, we introduce the expression RSS_m^+ , which represents the residual sum of squares computed over the inlier set \mathcal{I}_m attached to model m , but for the full model M :

$$\text{RSS}_m^+ = \sum_{p \in \mathcal{I}_m} r_{\hat{\theta}_M}^2(p). \quad (5)$$

As recall in Section 3.1, the minimization in (2) is solved by applying the Iteratively Reweighted Least Squares algorithm within a coarse-to-fine framework. At convergence, the final weights $\alpha_m(p), p \in \Omega$, are given by:

$$\alpha_m(p) = \frac{\psi(r_{\hat{\theta}_m}(p))}{r_{\hat{\theta}_m}(p)}, \quad (6)$$

where the influence function $\psi(\cdot)$ is the derivative of the robust function $\rho(\cdot)$, $\psi(r) = \frac{d\rho(r)}{dr}$. In practice, we adopt the robust estimation method defined in [27], and we use the publicly available Motion2D¹ software implementing this method.

3.3 Set of parametric motion models

We are dealing with 2D polynomial motion models ranging from translation (polynomial of degree 0) to quadratic models (polynomials of degree 2), including different affine models (polynomials of degree 1). They are forming a set of models which is *partly nested*. The model

¹ <http://www.irisa.fr/vista/Motion2D/>

complexity ranges from dimension 2 to dimension 12. The full set of motion models is given in Table 1 with their main features. The explicit equivalence, when available, between the 2D polynomial models and physical motions assumes a perspective projection for the image formation.

Let us mention that the constant part of the affine motion model does not necessarily mean that the underlying physical motion has actually a translation component. Indeed, the constant part is merely the velocity vector given by the motion model at the origin of the image coordinate system. The in-plane rotation is not necessarily centered at the origin. The same holds for the focus of expansion in case of scaling motion, knowing that the scaling motion in the image is due to a translation of the camera along its axis of view. The 8-parameter quadratic motion model corresponds precisely to a rigid motion between a planar surface and the camera. The 2-parameter quadratic model also trully accounts for a pan-tilt camera motion. The most complex model FQ is considered as the full model M .

4 Robust motion model selection with RTIC

An intuitive approach for defining a robust motion model selection framework is to draw from classical statistical information criteria. However, instead of starting from AIC or BIC, we consider the Takeuchi information criterion (TIC) which is a more general derivation of Akaike's information criterion [7].

4.1 TIC criterion

TIC can be written as follows:

$$\text{TIC}(m) = 2\mathcal{K}(\hat{\theta}_m) + 2 \text{tr}(P(\theta_m)Q(\theta_m)^{-1}), \quad (7)$$

where \mathcal{K} denotes the contrast function. Equivalently, it could be referred to as the negated logarithm of the likelihood, or the pseudo-likelihood function. "tr" is the trace of the matrix. The two $m \times m$ matrices $P(\theta_m)$ and $Q(\theta_m)$ respectively involve first and second mixed partial derivatives of the likelihood function w.r.t. model parameters. In the regression case, the two matrices P and Q are defined by:

$$\begin{aligned} P(\theta_m) &= E\left[\frac{\partial}{\partial \theta_i} g(r_\theta(p)) \frac{\partial}{\partial \theta_j} g(r_\theta(p))^T\right]_{|\theta=\hat{\theta}_m} \\ Q(\theta_m) &= E\left[\frac{\partial^2}{\partial \theta_i \partial \theta_j} g(r_\theta(p))\right]_{|\theta=\hat{\theta}_m}, \end{aligned} \quad (8)$$

where $\{\theta_i, i = 1, m\}$ and $\{\theta_j, j = 1, m\}$ denote components of the parameter vector θ_m , function $g(\cdot)$ is defined by $\mathcal{K}(\theta_m) = \sum_p g(r_{\theta_m}(p))$, $r_{\theta_m}(p)$ acts as the regression residual, and E denotes expectation.

4.2 Robust TIC

In the context of robust estimation, the g function is now specified as a robust penalty function $\rho(\cdot)$, which was introduced in eq.(2). We come up with the following expression of the Takeuchi information criterion, which we will call Robust Takeuchi Information Criterion (RTIC) to make it short:

$$\text{RTIC}(m) = 2 \sum_{p \in \Omega} \rho(r_{\hat{\theta}_m}(p)) + 2q_m \frac{E[\psi(r_\theta(p))^2]}{E[\psi'(r_\theta(p))]}_{|\theta=\hat{\theta}_m}, \quad (9)$$

where q_m is the dimension (i.e., number of parameters) of model m , $\psi(\cdot)$ is the influence function as defined in subsection 3.2, and ψ' its derivative.

We develop two versions of RTIC for the Talwar and Huber penalty functions. The Talwar function is defined by:

$$\rho_{tal}(r) = \begin{cases} r^2/2 & \text{if } |r| \leq \alpha \\ \alpha^2/2 & \text{if } |r| > \alpha \end{cases} \quad (10)$$

Knowing that the inlier set \mathcal{I}_m corresponds to points p such that $|r_{\theta_m}(p)| \leq \alpha$, we estimate the expectation as:

$$E[\psi(r_\theta(p))^2] \simeq \frac{1}{|\Omega|} \sum_{p \in \Omega} \psi(r_\theta(p))^2 = \frac{1}{|\Omega|} \sum_{p \in \mathcal{I}_m} r_\theta^2(p),$$

$$\text{and } E[\psi'(r_\theta(p))] \simeq \frac{|\mathcal{I}_m|}{|\Omega|}, \quad (11)$$

where $|\cdot|$ denotes the cardinality of the set. We get the following expression of RTIC for the Talwar penalty function:

$$\text{RTIC}_{tal}(m) = 2 \sum_{p \in \Omega} \rho(r_{\hat{\theta}_m}(p)) + \frac{2q_m}{|\mathcal{I}_m|} \sum_{p \in \mathcal{I}_m} r_{\hat{\theta}_m}^2(p). \quad (12)$$

We make the same development for the Huber function defined as follows:

$$\rho_{hub}(r) = \begin{cases} \frac{1}{2}r^2 & \text{if } |r| \leq \alpha \\ \alpha(|r| - \frac{1}{2}\alpha) & \text{if } |r| > \alpha, \end{cases} \quad (13)$$

and the RTIC expression turns out to write for the Huber function:

$$\begin{aligned} \text{RTIC}_{hub}(m) &= 2 \sum_{p \in \Omega} \rho(r_{\hat{\theta}_m}(p)) + \frac{2q_m}{|\mathcal{I}_m|} \left(\sum_{p \in \mathcal{I}_m} r_{\hat{\theta}_m}^2(p) \right. \\ &\quad \left. + \sum_{p \in \Omega \setminus \mathcal{I}_m} \alpha^2 \right). \end{aligned} \quad (14)$$

The selected model \tilde{m} is the one minimizing $\text{RTIC}_{tal}(m)$ (respectively $\text{RTIC}_{hub}(m)$) among the tested models. The parameters $\hat{\theta}_m$ are obtained from (2) with the Talwar (resp. Huber) ρ -penalty function. In contrast to RAIC and RBIC, the size $|\mathcal{I}_m|$ of the inlier set explicitly intervenes in the second term of the expression of the two RTIC variants (12) and (14). Minimizing RTIC implies to maximize the size of the inlier set.

5 Robust motion model selection with FRIC

On the other hand, we have investigated a very different approach than those proposed so far for robust model selection. As in [11], we adopt now a two-class hypothesis test approach. This is first motivated by the fact that we are dealing with a non nested set of parametric motion models. For instance, both the rotation and the scaling models involve three parameters as described in Section 3.3, but they account for quite different motions. Moreover, we aim to select the model m which explains the motion of the maximum number of points in the estimation support, that is, with the largest possible inlier set. Let us stress that taking the as less complex as possible motion model, while maximizing the size of the inlier set, may be contradictory in most tasks of dynamic scene analysis. Then, it is beneficial to explicitly tackle this issue from the off.

5.1 Fisher statistic

First, we want to compare any model m of the set of tested models to the full model M . To this end, we resort to the Fisher statistic [33], which can be formulated in our case as:

$$\mathcal{F}(m) = \frac{(RSS_m - RSS_m^+) / (q_M - q_m)}{RSS_m^+ / (|\mathcal{I}_m| - q_M)}, \quad (15)$$

where again $|\cdot|$ designates the set cardinality, q_m represents the number of parameters of model m . Both RSS_m and RSS_m^+ are evaluated on the inlier set \mathcal{I}_m attached to the tested model m . To really deal with Fisher statistic, both model parameters, θ_m and θ_M , must be estimated on the same set too. Therefore, we re-estimate θ_m and θ_M over \mathcal{I}_m in a least-square setting, before evaluating $\mathcal{F}(m)$. By the way, it also improves the estimated parameters of model m , and consequently, the model fit.

To make expression (15) an actual Fisher statistic, we must also check that $|\mathcal{I}_m|$ can be considered as a deterministic variable. An image point p belongs to the inlier set if its attached weight at the end of the IRLS procedure, is greater than a given threshold. We can at least empirically assess the absence of randomness, by providing histograms of weights computed for the estimation of the motion parameters in the IRLS procedure, as explained in subsection 3.1. Examples are supplied in Fig.1 for the use of the Tukey function in the motion model parameter estimation. Similar behavior was observed in many experiments. The plots show that the weight histograms are clearly bimodal, with one mode close to 0 and the second one close to 1, after normalization of the weights. Then, the inlier set

\mathcal{I}_m is easy to get, and this step does not introduce any randomness. In addition, there is quite a large range to fix the threshold value. In practice, we will take 0.5 as the threshold value. Then, it does not impact the number of inliers, which means that the cardinality of the inlier set is as legitimate as the fit residual and the model complexity in the definition of the robust model selection criterion. The configuration is even simpler in the case of the Talwarand Tuckey functions, since the weights are null for outliers and strictly positive for inlier points.

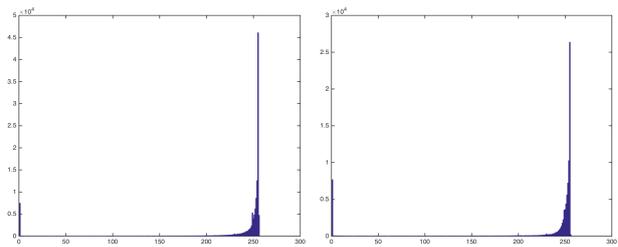


Fig. 1 Examples of histograms of weights supplied by the IRLS procedure in the robust estimation of the image dominant motion model for two different experiments.

The denominator of expression (15) can be interpreted as a non-biased empirical estimate of the full model variance computed on \mathcal{I}_m . It will be denoted by:

$$\hat{\sigma}_M^2(\mathcal{I}_m) = \frac{RSS_m^+}{|\mathcal{I}_m| - q_M}. \quad (16)$$

The statistic $\mathcal{F}(m)$ allows us to decide whether model m is a more significant representation of the unknown true motion than the full model M over \mathcal{I}_m which is the validity domain of model m in Ω . However, it will supply all the models m of that type. We need to take into account the dimension q_m of model m to further select the right one.

5.2 Fisher-based robust information criterion (FRIC)

Starting from (15), and penalizing the complexity of the model expressed by the number q_m of model parameters, we define the Fisher-based robust information criterion:

$$FRIC_1(m) = \mathcal{F}(m)(q_M - q_m) + 2q_m. \quad (17)$$

Under the assumption of validity of model m , $\mathcal{F}(m)$ follows a Fisher distribution $F(q_M - q_m, |\mathcal{I}_m| - q_M)$. Then, the first term of the right member of (17) (approximately) follows a χ^2 distribution with $q_M - q_m$ degrees of freedom.

We can now write the test for selecting the best motion model \tilde{m} in this robust model selection framework:

$$\tilde{m} = \arg \min_m \text{FRIC}_1(m). \quad (18)$$

The theoretical behavior of this test can be qualitatively described as follows. $\text{FRIC}_1(m)$ is supposed to decrease when evaluating in turn the first successive models in decreasing (or equivalently increasing) complexity order up to the optimal model m^* , and then to increase for the subsequent models. This is confirmed by Fig.2 which contains plots of $\text{FRIC}_1(m)$ values for several experiments.

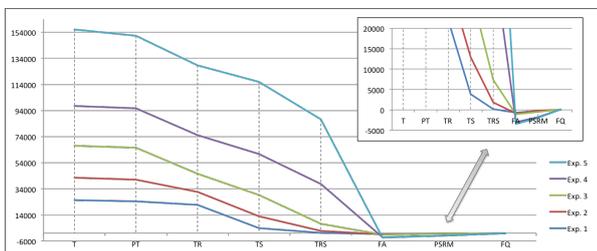


Fig. 2 Plots of $\text{FRIC}_1(m)$ values corresponding to the set of tested motion models for several experiments. Tested motion models are those listed in Table 1, and ordered according to the number of parameters. The true model is FA.

We design a second version of the Fisher-based robust model selection criterion, by incorporating the number of inliers in the model complexity penalization as in the BIC criterion, that is:

$$\text{FRIC}_2(m) = \mathcal{F}(m)(q_M - q_m) + 2 \log(|\mathcal{I}_m|)q_m. \quad (19)$$

5.3 Interpretation of FRIC as robust C_p

We now provide another interpretation of the Fisher-based robust information criterion (FRIC) defined in (17). Let us first make $\hat{\sigma}_M^2(\mathcal{I}_m)$ appear in the expression of $\text{FRIC}_1(m)$ as follows:

$$\text{FRIC}_1(m) = \frac{(\text{RSS}_m - \text{RSS}_m^+)}{\hat{\sigma}_M^2(\mathcal{I}_m)} + 2q_m, \quad (20)$$

By exploiting (3) and (16), it can be further developed into:

$$\text{FRIC}_1(m) = \frac{1}{\hat{\sigma}_M^2(\mathcal{I}_m)} \sum_{p \in \mathcal{I}_m} r_{\hat{\theta}_m}^2(p) - |\mathcal{I}_m| + q_M + 2q_m. \quad (21)$$

If we neglect q_M which is a constant term for the test (18), expression (21) can be viewed as the Mallows'

C_p criterion [22], computed over the inlier set attached to model m with $|\mathcal{I}_m|$ as the number of observations. Then, our test (18) could also be interpreted as a robust version of the Mallows' C_p criterion.

Let us point out that (21) explicitly involves the aforementioned trade-off between maximizing the size $|\mathcal{I}_m|$ of the inlier set and minimizing the complexity (i.e., the number q_m of parameters) of the selected motion model. In contrast, for existing robust model selection criteria such as RAIC or RBIC which write

$$\text{RAIC} = \sum_{p \in \Omega} \rho(r_{\hat{\theta}_m}(p)) + q_m, \quad (22)$$

and

$$\text{RBIC} = \sum_{p \in \Omega} \rho(r_{\hat{\theta}_m}(p)) + \log |\Omega| q_m, \quad (23)$$

the model selection is only implicitly influenced by the size of the inlier set attached to model m through the values of the robust function $\rho(\cdot)$ at the outlier points. Hence, the impact depends on the asymptotic behavior of the robust function. The same holds for [32] where in addition the penalty term requires additional expensive computation to be evaluated.

6 Experimental results

As pointed out in the introduction, we take the computation of the dominant image motion to experimentally validate our robust motion selection methods. Indeed, it is the right task for this goal. In contrast to motion segmentation for instance, it is a pure estimation problem. Furthermore, it must tackle the presence of outliers consisting in independently moving objects in the scene, since the dominant motion in the image is (most generally) induced by the camera movement. Thus, it is a robust estimation problem. Finally, choosing the right 2D motion model to properly approximate the dominant image motion is an issue, since the camera motion and the scene depth are most often unknown. In addition, it is a typical and very frequently needed task in dynamic scene analysis. However, there is no available benchmark for this purpose, and inferring ground truth on real videos may be not that easy. Since we focus on the model selection issue, we will report selection results only. The accuracy of the estimated motion model is conveyed by the model fit term of the criterion, and it is not a concern on its own for this work.

Dominant motion model	a_1, a_4	a_2, a_3, a_5, a_6	a_7, a_8
$T1$	$[-10,10]$	-	-
$T2$	$[-10,-1] \cup [1,10]$	-	-
$FA1$	$[-10,10]$	$[-0.001,0.001]$	-
$FA2$	$[-10,-1] \cup [1,10]$	$[-0.1,-0.001] \cup [0.001,0.1]$	-
$PSRM1$	$[-5,5]$	$[-0.01,0.01]$	$[-0.001,0.001]$
$PSRM2$	$[-10,-1] \cup [1,10]$	$[-1e10^{-4}, -1e10^{-2}] \cup [-1e10^{-4}, -1e10^{-2}]$	$[-1e10^{-5}, -1e10^{-4}] \cup [1e10^{-5}, 1e10^{-4}]$

Table 2 Range of parameter values for the different motion models.

6.1 Statistical objective evaluation

To quantitatively assess the performance of the model selection criteria, we carried out a comparative objective evaluation on a synthetic dataset. We generated a series of image pairs by applying a velocity field to a real image, as demonstrated in Fig. 3. The velocity field involves two parametric subfields chosen from the list given in Table 1. The first parametric motion subfield is the dominant motion, and the outliers, forming a rectangular region in the middle of the image, undergo the second one.

Three groups of 3000 synthetic image pairs were generated, each group formed by different dominant and secondary motions. The first group involves a translation (T) motion model as dominant motion model and a full affine (FA) as secondary motion. The second set has a FA model as dominant motion and a planar surface rigid motion (PSRM) as secondary motion model. The last group has a PSRM model as the dominant one and a T model as the secondary one. Each group is divided in two sub-groups of 1500 image pairs each depending on the range used for the values of the parameters of the dominant motion, as summarized in Table 2. For each motion model used to create the image pairs, the value of its parameters is randomly selected in the interval given in Table 2.

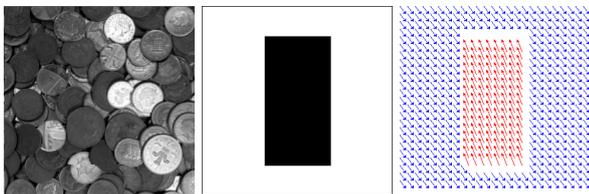


Fig. 3 From left to right: the input image, the outlier subset (in black) in the middle of the image, typical velocity field applied to the input image formed by a dominant motion and a secondary one.

We proceed to the selection of the dominant motion model in each experiment for each tested criterion. Rates of correct selection are summarized in Fig. 4. For a fair comparison, we decided to use the same penalty

function in all the experiments, for estimating the dominant parametric motion model, and for computing the four compared robust motion model selection criteria. For implementation issues, we took the Talwar penalty function, also available in the Motion2D software. Scores are given in percentage of the total number of the images in each experiment.

Overall, the proposed criteria $FRIC_1$, $FRIC_2$ and $RTIC$ outperform the existing one $RBIC$. Regarding $FRIC_2$, the rate of successful motion model selection is rather stable at a high level, ranging from a minimum of 74.4% of frames to a maximum of 83.4%. $FRIC_1$ also provides good results, but it has a lowest success rate with a minimum of 61.2% and a maximum of 82.1%. In general, $RBIC$ has a close but lower success rate than the three new criteria, and even reaches down to a very low rate at 38.6% for the $FA2$ experiment. $RTIC$ has the lowest success rate in the $T2$ experiment by a small margin, while being the best performing criterion for all the other experiments.. Especially, when the complexity of the dominant motion models increases, $RTIC$ yields the best results, even scoring over a 94% success rate in a couple of experiments.

Tables 3 and 4 detail the scores obtained with $FRIC_2$ and $RTIC$ respectively, the two best criteria, for all the tested models and for the six subsets of experiments. Wrong selections are spread, but mostly concern more complex models than the true one.

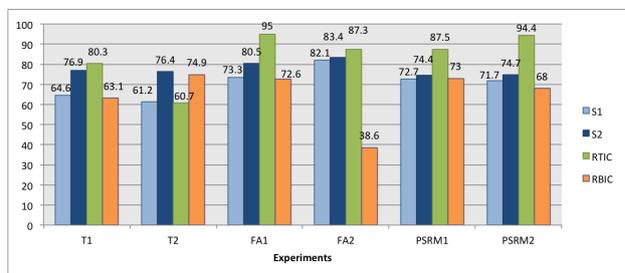


Fig. 4 Rates of correct classification for each group of experiments obtained with the four model selection criteria (given in percentage of the total number of examples in each experiment).

Tested models	True dominant motion models					
	T	T	FA	FA	PSRM	PSRM
T	76.9	76.4	0.1	1.5	0.1	0.1
TR	9.3	7.7	0.7	0.6	0.1	0.2
TS	1.4	11.8	0.3	1.1	0.1	0.1
TRS	0.1	0.6	2.1	0.2	0.3	0.2
FA	0.4	0.3	80.5	83.4	0.2	2.1
PT	2.1	0.7	0.1	3.9	0.9	2.4
PSRM	1.3	0.4	7.3	6.9	74.4	74.7
FQ	8.5	2.1	8.9	2.4	23.9	20.2

Table 3 Scores obtained with criterion $FRIC_2$ for all the tested models and for the six experiments, in percentage of the total number of examples in each experiment.

Tested models	True dominant motion models					
	T	T	FA	FA	PSRM	PSRM
T	80.3	60.7	0	0	0	0
TR	11	15.9	0	0	0	0.1
TS	4	17.2	0	0	0	0
TRS	0.4	3.2	0.2	0	0	0
FA	0.6	0.5	95	87.3	0	0.2
PT	3.4	1	0	0.4	0	0
PSRM	0	0.7	1.1	9.1	87.5	94.4
FQ	0.3	0.8	3.7	3.2	12.5	5.3

Table 4 Scores obtained with criterion $RTIC$ for all the tested models and for the six experiments, in percentage of the total number of examples in each experiment.

6.2 Results on real image sequences

To evaluate the performance of the proposed criteria on real cases, we carried out experiments on two sets of video sequences. The first one contains videos acquired with a robot setup in our lab, the second set gathers videos collected on the web.

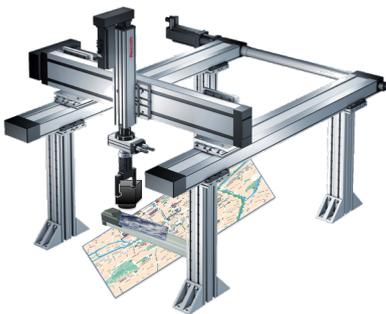


Fig. 5 Robotic setup for the acquisition of video sequences. The camera is mounted at the robot end effector. The scene background is a planar surface formed by a poster. The outlier object is a square flat object translating along an axis put on the poster.

For the real experiments, we keep a subset of five motion models of Table 1: $\{T, TR, TS, PSRM, FQ\}$. FA was removed since it does not precisely correspond to any given camera motion. Clearly, inferring the ground-

truth motion models in real sequences is harder. As a consequence, we limited the set of motion models to models representative of real physical camera motion. In addition, FQ still serves as the full model. PT is removed since it involves the same two parameters as T, and the perceived motion is quite similar for the two respective camera motions.

The first set of real image sequences were acquired with a camera mounted on a Cartesian coordinate robot available in our lab. The setup enables to apply a given motion type to the robot. Ideally, the motion applied to the robot, and then to the camera, induces the dominant motion of the image sequence. Since we estimate one single motion model to account for the dominant image motion, we need to assume a planar scene so that the ground-truth motion model can be inferred unambiguously for the dominant image motion. Otherwise, in case of a non shallow scene, we would need multiple motion models and a segmentation framework to fit a motion model to each part of the scene, since depth and surface orientation impact on the resulting image motion. However, this is beyond the scope of this work. For these lab video sequences, a poster depicting an aerial view of a city constitutes the scene background. In addition, we introduce an independent motion in the scene using an additional single axis robot bearing a flat object and moving in the field of view of the camera. The complete setup is drawn on Fig.5. A sample of acquired

images is given in Fig.6 showing that the outlier moving region may occupy a substantial part of the image (on the left of the image).

We report two experiments. In the first experiment, a rotation around the view axis is applied to the robot to produce an image sequence of 146 frames as illustrated in Fig.6. Since the rotation axis does not pass by the optical center, the expected dominant motion model is the combination of a translation and a in-plane rotation (TR).

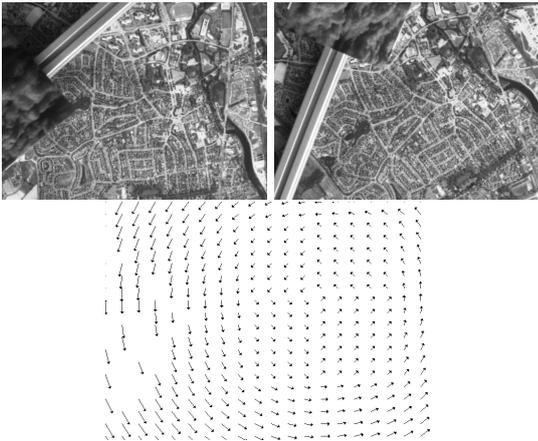


Fig. 6 First and last frames of the first robot sequence, and the dominant flow between frames 0 and 1 computed with TR model.

Table 5 contains the model selection results provided by our criteria $FRIC_1$, $FRIC_2$ and RTIC, along with RBIC. $FRIC_2$ and RTIC select the true motion model (TR) with a good percentage rate of 64.8% and 76% respectively. Let us observe that the motion models without rotation (T and TS) are never selected, demonstrating that the key component of the dominant motion is consistently well identified. $FRIC_1$ selection is more balanced between TR and the full model FQ. RBIC selects the full model in almost the whole sequence. For this experiment, RTIC is the best criterion by a large margin.

	T	TR	TS	PSRM	FQ
$FRIC_1$	0	46.4	0	7.8	45.8
$FRIC_2$	0	64.8	0	6.7	28.5
RTIC	0	76	0	0.5	23.5
RBIC	0.6	0	0	3.9	95.5

Table 5 Selected motion models over the sequence of Fig.6 for the four compared criteria (in percentage of the total number of frames).

For the second experiment using the robotic setup, a translation is applied along one axis of the Cartesian robot and parallel to the camera optical axis, producing a divergent motion in the image. However, the focus of expansion is not at the center of the image plane. Then, the expected dominant motion model is TS. A sequence of 170 frames was acquired. Results are collected in Table 6. This experiment illustrates that the problem is not that simple and the criteria may partly fail. The three proposed criteria mostly select PSRM as dominant motion model. RTIC and $FRIC_1$ select TS in third place, while $FRIC_2$ selects TS (the assumed true dominant motion model) in second place. Meanwhile, RBIC still selects the full model. However, the expected true model (TS) may possibly be questionable, since the actual robot motion may slightly depart from the specified command. Yet, PSRM is also a relevant choice since the surface is planar and the robot motion is rigid. Then, if we add the scores for TS and PSRM, we get a cumulated score of 71.2%, 77.6% and 58.2%, for $FRIC_1$, $FRIC_2$, and RTIC respectively, whereas RBIC stagnates at a score of 7.6%. For this experiment, $FRIC_2$ is the best criterion by a large margin.

	T	TR	TS	PSRM	FQ
$FRIC_1$	0	0	23.5	47.7	28.8
$FRIC_2$	0	0	28.2	49.4	22.4
RTIC	0	0.6	15.3	42.9	41.2
RBIC	0	0	4.1	3.5	92.4

Table 6 Motion models selected by the compared criteria over the second robot sequence (in percentage of the total number of frames).

We now report results on three video sequences taken from the net. The first one depicts a field scene acquired from an airborne camera. The sequence contains 84 frames and the scene is almost planar. The outlier moving object is the reaping machine with the dust cloud behind it (Fig.7). It is difficult to infer the precise ground truth from the video alone, we do not know the camera orientation with respect to the ground and its exact motion. However, it can be assumed that the PRSM model should be the most relevant one. Since in previous experiments, $FRIC_2$ systematically outperforms $FRIC_1$, we only include $FRIC_2$ in the next experiments.

Table 7 shows that both proposed criteria $FRIC_2$ and RTIC first select PSRM as the dominant motion of the sequence. However, $FRIC_2$ achieves a greater correct classification rate of 73.8% of the image pairs, than RTIC which obtains a rate of 54.8%. In contrast, RBIC

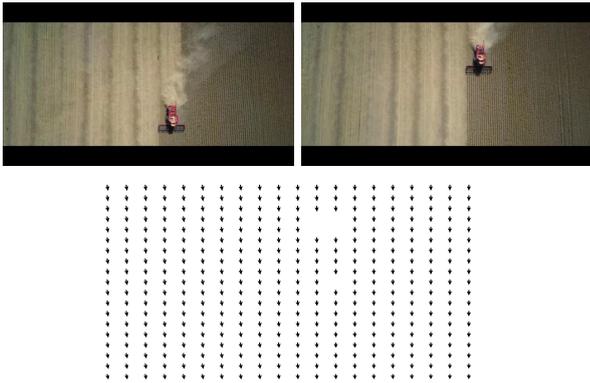


Fig. 7 First and last frames of the field scene sequence, and the dominant flow between frames 0 and 1 computed with PSRM model.

selects the full model as dominant motion, with PSRM in second place.

	T	TR	TS	PSRM	FQ
$FRIC_2$	9.5	0	3.6	73.8	13.1
$RTIC$	0	0	2.4	54.8	42.8
$RBIC$	0	1.2	13.1	34.5	51.2

Table 7 Selected motion models over the field sequence of Fig.7 for the three compared criteria.

The second real video consists of a sequence of 54 frames (Fig.8). Visually, the camera moves away from the scene, which leads to consider TS as the true dominant motion model. As in the previous sequence, the scene is almost planar and the vehicles present in it constitute the outliers to the dominant motion.

We report in Table 8 the selection scores of the com-

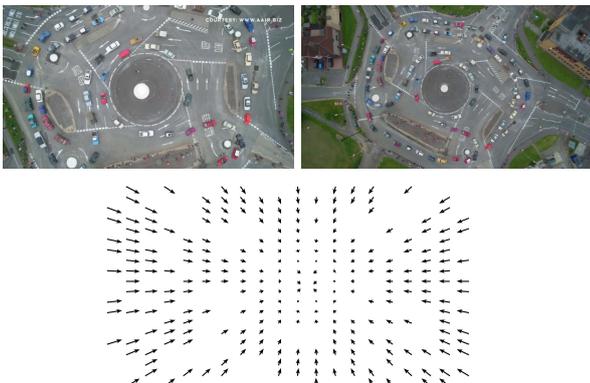


Fig. 8 First and last frames of the roundabout sequence and the dominant motion between the first and second images computed with TS model.

pared criteria for the five tested motion models in the

sequence of Fig.8. The right motion model TS is correctly selected by $FRIC_2$, but not by RTIC nor RBIC, both selecting the FQ model.

	T	TR	TS	PSRM	FQ
$FRIC_2$	16.6	0	72.2	5.6	5.6
$RTIC$	0	5.6	0	16.6	77.8
$RBIC$	0	0	0	16.7	83.3

Table 8 Motion models selected by the three compared criteria over the roundabout sequence of Fig.8.

The last real video example involves a sequence where a partly planar scene is recorded from an aerial camera (Fig.9). A passing train introduces outliers to the dominant motion, The camera motion is apparently parallel to the ground with a slight rotation. We can assume that the TR motion model is the true one.

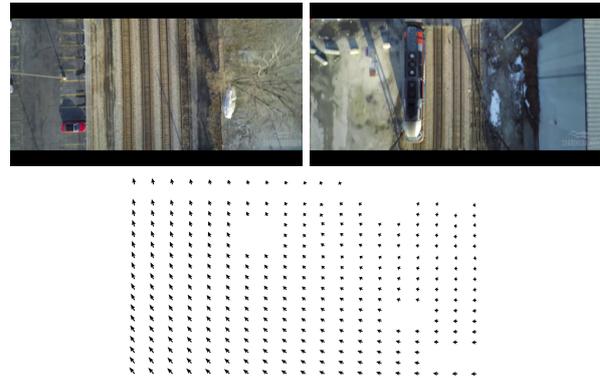


Fig. 9 First and last frames of the train sequence and the dominant motion between the first and second frames computed with TR model.

We can observe in Table 9 that $FRIC_2$ selects TR as dominant motion, both with a rate of 45.9%. They also select T and TS in almost half of the sequence, which are still reasonable choices. RTIC and RBIC incorrectly select the full model for most of the sequence.

For these three real image videos, $FRIC_2$ is the one which consistently supplies good results. Let us add that the RAIC criterion will not give better results than RBIC which is almost always stuck on the full model FQ when dealing with real image sequences. Indeed, the RAIC penalty of the model dimension (eq.(22) is far lower than the one of RBIC (eq. (23)).

7 Conclusion

We have proposed two new robust motion model selection criteria. The first one is a robust version of the

	T	TR	TS	PSRM	FQ
$FRIC_2$	25	45.9	20.8	8.3	0
$RTIC$	0	0	0	4.2	95.8
$RBIC$	0	8.3	8.3	0	83.4

Table 9 Motion models selected by the three compared criteria over the train sequence of Fig.9.

Takeuchi information criterion called RTIC. The second one departs from the usual approach by starting from the Fisher statistic. We designed two variants of the latter, $FRIC_1$ and $FRIC_2$. All three are easy to compute. The three criteria explicitly tackle the trade-off between the size of the inlier set (to be maximized) and the complexity of the motion model (to be minimized). In addition, $FRIC_1$ can be viewed as a proposition for a robust Mallows' C_P criterion. Experiments on synthetic and real image sequences, along with comparison with RBIC, demonstrate that our criteria achieve superior performance. RTIC supplied the best performance on the synthetic dataset, whereas $FRIC_2$ performed the best on the tested real videos. This demonstrates that the two proposed robust motion selection criteria, RTIC and FRIC, are complementary and bring valuable contributions.

Acknowledgements

This work was supported in part by Conacyt grant for Bertha Mayela Toledo Acosta's thesis. The authors thank Fabien Spindler for the video acquisitions with the robotic setup.

References

1. C. Agostinelli. Robust model selection in regression via weighted likelihood methodology. *Statistics & Probability Letters*, 56:289–300, 2002. **2**
2. H. Akaike. A new look at the statistical model identification. *IEEE Trans. on Automatic Control*, 19(6):716–723, Dec. 1974. **1**
3. S. Ayer and H. S. Sawhney. Layered representation of motion video using robust maximum likelihood estimation of mixture models and MDL encoding. In *ICCV*, Cambridge, Jun. 1995. **3**
4. A. Basset, P. Bouthemy, and C. Kervrann. Recovery of motion patterns and dominant paths in videos of crowded scenes. In *ICIP*, Paris, Oct. 2014. **2**
5. M.J. Black and P. Anandan. The robust estimation of multiple motions: Parametric and piecewise-smooth flow fields. *Computer Vision and Image Understanding*, 63(1):75–104, 1996. **1, 2, 4**
6. P. Bouthemy, B.M. Toledo Acosta, and B. Delyon. Robust selection of parametric motion models in image sequences. In *ICIP*, Phoenix, Oct. 2016. **2**
7. K. P. Burnham and D.R. Anderson. *Model selection and multimodel inference: A practical information-theoretic approach (2nd ed.)*. Springer-Verlag, 2002. **1, 2, 5**
8. D. Cremers and S. Soatto. Motion competition: A variational approach to piecewise parametric motion segmentation. *Int. Journal of Computer Vision*, 62(3):249–265, May 2005. **1**
9. B. Fauvet, P. Bouthemy, P. Gros, and F. Spindler. A geometrical key-frame selection method exploiting dominant motion estimation in video. In *CVIR*, Dublin, July 2004. **1**
10. D. Fortun, P. Bouthemy, and C. Kervrann. Optic flow modeling and computation: a survey. *Computer Vision and Image Understanding*, 134:1–21, May 2015. **1, 3, 4**
11. E. François and P. Bouthemy. Derivation of qualitative information in motion analysis. *Image and Vision Computing Journal*, 8(4):279–287, Nov. 1990. **1, 2, 6**
12. N. Gheissari and A. Bab-Hadiashar. Motion analysis: Model selection and motion segmentation. In *ICIAP*, Mantova, Sep. 2003. **3**
13. N. Gheissari and A. Bab-Hadiashar. A comparative study of model selection criteria for computer vision applications. *Image and Vision Computing*, 26(12):1636–1649, Dec. 2008. **1, 2**
14. P.W. Holland and R.E. Welsch. Robust regression using iteratively reweighted least squares. *Communications in Statistics, Theory and Methods*, 6(9):813–827, 1977. **2, 4**
15. P.J. Huber. *Robust Statistics*. Wiley Series in Probability and Statistics, Wiley, 1981. **2**
16. M. Jain, J. van Gemert, H. Jégou, P. Bouthemy, and C.G.M. Snoek. Tubelets: Unsupervised action proposals from spatiotemporal super-voxels. *Int. Journal of Computer Vision*, 124(3):287–311, September 2017. **1**
17. K. Kanatani. Geometric information criterion for model selection. *Int. J. of Computer Vision*, 26(3):171–189, 1998. **3**
18. K. Kanatani. Model selection for geometric inference. In *ACCV*, Melbourne, Jan. 2002. **2**
19. S. Konishi and G. Kitagawa. *Information Criteria and Statistical Modeling*. Springer Series in Statistics, Springer, 2008. **2, 3**
20. J.A.F. Machado. Robust model selection and M-estimation. *Econometric Theory*, 9:478–493, 1993. **2**
21. L. Magri and A. Fusiello. T-linkage: A continuous relaxation of J-linkage for multi-model fitting. In *CVPR*, Columbus, June 2014. **2**
22. C. Mallows. Some comments on Cp. *Technometrics*, 15:661–675, 1973. **1, 2, 7**
23. S. Marsland, C.J. Twining, and C. J. Taylor. A minimum description length objective function for groupwise non-rigid image registration. *Image and Vision Computing*, 26(3):333–346, Mar. 2008. **2**
24. Y. Matsushita, E. Ofek, W. Ge, X. Tang, and H.-Y. Shum. Full-frame video stabilization with motion inpainting. *IEEE Trans. on Pattern Analysis and Machine Intelligence*, 28(7):1150–1163, Jul. 2006. **1**
25. P. Meer. Robust techniques for computer vision. In *Emerging Topics in Computer Vision*, G. Medioni and S. B. Kang (eds.), Prentice Hall, 107–190, 2004. **2**
26. S. Müller and A. H. Welsh. Outlier robust model selection in linear regression. *Journal of the American Statistical Association*, 100(472):1297–1310, Dec. 2005. **2**
27. J.-M. Odobez and P. Bouthemy. Robust multiresolution estimation of parametric motion models. *J. Visual Communication and Image Representation*, 6(4):348–369, Dec. 1995. **2, 4**

- 1 28. J.M. Perez Rua, A. Basset, P. Bouthemy. Detection and localization of anomalous motion in video sequences from local histograms of labeled affine flows. *Frontiers in ICT: Computer Image Analysis*, doi.org/10.3389/fict.2017.00010, May 2017. **1**
- 2 29. G. Qian and H.R. Künsch. On model selection via stochastic complexity in robust linear regression. *Journal of Statistical Planning and Inference*, 75:91–116, 1998. **2**
- 3 30. J. Rissanen. Modeling by shortest data description. *Automatica*, 14:465–471, 1978. **1**
- 4 31. E. Ronchetti. Robust model selection in regression. *Statistics & Probability Letters*, 3:21–23, 1985. **2**
- 5 32. E. Ronchetti and R.G. Staudte. A robust version of Mallows's Cp. *Journal of The American Statistical Association*, 89(426):550–559, Jun. 1994. **2, 7**
- 6 33. G.G. Roussas. *A Course in Mathematical Statistics*. Academic Press, 1997. **6**
- 7 34. S. Saleh. Robust AIC with high breakdown scale estimate. *Journal of Applied Mathematics*, Article ID 286414, 2014. **2**
- 8 35. K. Schindler, D. Suter, and H. Wang. A model-selection framework for multibody structure-and-motion of image sequences. *Int. Journal of Computer Vision*, 79:159–177, 2008. **2**
- 9 36. G. Schwarz. Estimating the dimension of a model. *The Annals of Statistics*, 6(2):461–464, 1978. **1**
- 10 37. T. Senst, V. Eiselen and T. Sikora. Robust local optical flow for feature tracking. *IEEE Trans. on Circuits and Systems for Video Technology*, 22(9):1377–1387, Sep. 2012. **1, 2, 4**
- 11 38. R. Szeliski. Image alignment and stitching: A tutorial. *Foundations and Trends in Computer Graphics and Computer Vision*, 2(1):1-104, Dec. 2006. **1**
- 12 39. R.B. Tennakoon, A. Bab-Hadiashar, Z. Cao, R. Hoseinezhad, and D. Suter. Robust model fitting using higher than minimal subset sampling. *IEEE Trans. on Pattern Analysis and Machine Intelligence*, 38(2):350–362, Feb. 2016. **2**
- 13 40. M. Tepper and G. Sapiro. Nonnegative matrix underapproximation for robust multiple model fitting. In *CVPR*, Honolulu, July 2017. **2**
- 14 41. P. Torr. An assessment of information criteria for motion model selection. In *CVPR*, San Juan, June 1997. **1, 2, 3**
- 15 42. S. Tu and L. Xu. A theoretical investigation of several model selection criteria for dimensionality reduction. *Pattern Recognition Letters*, 33(9):1117–1126, July 2012. **1**
- 16 43. T. Veit, F. Cao, and P. Bouthemy. An a contrario decision framework for region-based motion detection. *Int. Journal of Computer Vision*, 68(2):163-178, 2006. **1**
- 17 44. H. Wechsler, Z. Duric, F. Li, and V. Cherkassky. Motion estimation using statistical learning theory. *IEEE Trans. on Pattern Analysis and Machine Intelligence*, 26(4):466–478, Apr. 2004. **2**
- 18 45. J. Yang and H. Li. Dense, accurate optical flow estimation with piecewise parametric model. In *CVPR*, Boston, June 2015. **1**
- 19 46. A. Yilmaz, O. Javed, and M. Shah. Object tracking: A survey. *ACM Computing Surveys*, 38(4), Dec. 2006. **1**