

# Harmonic Maxwell equations and their Finite Element discretization

*Les équations de Maxwell harmoniques et leurs discrétisations par éléments finis*

Monique Dauge & Martin Costabel

IRMAR, Université de Rennes 1, FRANCE

Cours Doctoral IRMAR 2019

25 & 26 février 2029

<http://perso.univ-rennes1.fr/monique.dauge>

# Outline / *Plan* / Planned contributions by MD and MC

## Part I. Introduction to Maxwell equations [MD]

- 1 **Notations**
- 2 **Maxwell equations**
- 3 **Variational formulation for cavity problem**

## Part II. **Traps** in Finite element discretization / *Quelques pièges* [MD]

- 4 **Toy problem – Bench test**
- 5 **Numerical test / *Rien ne va plus***

## Part III. Elliptic regularization: **bad** and **good** methods [MD]

- 6 **Standard regularization**
- 7 **Non-convex corners**
- 8 **Weighted regularization**

## Part IV. Edge element techniques [MC]

# Part I

## Introduction to Maxwell equations

# Outline

- 1 Notations**
- 2 Maxwell equations
- 3 Variational formulation for cavity problem

# Before stating equations, agree on notations and conventions

Slides written in English / *Transparents en anglais, avec quelques traductions*

## Colors

- Direction that we will follow
- Direction that we will leave
- Important expressions
- Emphasize or Danger

## General notation

- $t \in \mathbb{R}$ , time variable
- $\partial_t := \frac{\partial}{\partial t}$ , time derivative
- $\mathbf{x}$ , space variable
  - In 3 dimensions  $\mathbf{x} = (x_1, x_2, x_3)$
  - In 2 dimensions  $\mathbf{x} = (x_1, x_2)$
- For  $j \in \{1, 2, 3\}$ ,  $\partial_j := \frac{\partial}{\partial x_j}$  partial space derivative

## Operators of order 1 and 2 in 3 dimensions of space

$\nabla$  is the gradient operator. For scalar distribution  $\varphi$

$$\nabla\varphi = \begin{pmatrix} \partial_1\varphi \\ \partial_2\varphi \\ \partial_3\varphi \end{pmatrix}$$

**div** is the divergence operator: For vector distributions  $\mathbf{u} = (u_1, u_2, u_3)$

$$\text{div } \mathbf{u} = \nabla \cdot \mathbf{u} = \partial_1 u_1 + \partial_2 u_2 + \partial_3 u_3$$

**curl** is the curl operator / *rotationnel*: For vector distributions  $\mathbf{u} = (u_1, u_2, u_3)$

$$\text{curl } \mathbf{u} = \nabla \times \mathbf{u} = \begin{pmatrix} \partial_2 u_3 - \partial_3 u_2 \\ \partial_3 u_1 - \partial_1 u_3 \\ \partial_1 u_2 - \partial_2 u_1 \end{pmatrix}$$

$\Delta$  is the Laplace operator (aka Laplacian). For scalar distribution  $\varphi$

$$\Delta\varphi = \partial_1^2\varphi + \partial_2^2\varphi + \partial_3^2\varphi$$

# Important relations

$$\operatorname{div} \nabla \varphi = \Delta \varphi$$

$$\operatorname{div} \operatorname{curl} \mathbf{u} = 0$$

$$\operatorname{curl} \nabla \varphi = 0$$

$$\operatorname{curl} \operatorname{curl} \mathbf{u} - \nabla \operatorname{div} \mathbf{u} = -\Delta \mathbf{u}$$

where the vector Laplacian is

$$\Delta \mathbf{u} = \begin{pmatrix} \Delta u_1 \\ \Delta u_2 \\ \Delta u_3 \end{pmatrix}$$

# Outline

- 1 Notations
- 2 Maxwell equations**
- 3 Variational formulation for cavity problem



## Time dependent Maxwell equations

Unknowns are 4 vector functions (fields / *champ*) with 3 components each

- $\mathcal{E}$  electric field
- $\mathcal{H}$  magnetic field
- $\mathcal{D}$  electric displacement
- $\mathcal{B}$  magnetic induction

Maxwell equations consist of the 4 relations

$$\partial_t \mathcal{B} + \mathbf{curl} \mathcal{E} = 0 \quad (1a)$$

$$\mathbf{div} \mathcal{D} = \rho \quad (1b)$$

$$\partial_t \mathcal{D} - \mathbf{curl} \mathcal{H} = -\mathcal{J} \quad (1c)$$

$$\mathbf{div} \mathcal{B} = 0 \quad (1d)$$

- (1a) Faraday's law
- (1b) Gauss's law with  $\rho$  the scalar charge density
- (1c) Ampère's circuital law, modified by Maxwell, with current density  $\mathcal{J}$
- (1d) tells that  $\mathcal{B}$  is solenoidal

## Time harmonic Maxwell equations

By partial in time Fourier transformation, or because the data  $\mathcal{J}$  and  $\rho$  are time harmonic, we assume that  $\mathcal{E}$ ,  $\mathcal{H}$ ,  $\mathcal{D}$ , and  $\mathcal{B}$  are time harmonic, i.e. that there exists  $\omega \in \mathbb{R}$  such that

$$\begin{aligned}\mathcal{E}(t, \mathbf{x}) &= e^{-i\omega t} \mathbf{E}(\mathbf{x}), & \mathcal{H}(t, \mathbf{x}) &= e^{-i\omega t} \mathbf{H}(\mathbf{x}), \\ \mathcal{B}(t, \mathbf{x}) &= e^{-i\omega t} \mathbf{B}(\mathbf{x}), & \mathcal{D}(t, \mathbf{x}) &= e^{-i\omega t} \mathbf{D}(\mathbf{x})\end{aligned}$$

Then the 4-equation system becomes

$$\mathbf{curl} \mathbf{E} - i\omega \mathbf{B} = 0 \quad (2a)$$

$$\operatorname{div} \mathbf{D} = \rho \quad (2b)$$

$$\mathbf{curl} \mathbf{H} + i\omega \mathbf{D} = \mathbf{J} \quad (2c)$$

$$\operatorname{div} \mathbf{B} = 0 \quad (2d)$$

Divergence constraints

- Apply  $\operatorname{div}$  to (2a)  $\implies i\omega \operatorname{div} \mathbf{B} = 0$ . Hence (2d) implied if  $\omega \neq 0$
- Apply  $\operatorname{div}$  to (2c)  $\implies i\omega \operatorname{div} \mathbf{D} = \operatorname{div} \mathbf{J}$ . Hence the relation  $i\omega \rho = \operatorname{div} \mathbf{J}$

The 4-equation system is not closed.

## Constitutive equations for linear media

Then  $\mathbf{D}$  is proportional to  $\mathbf{E}$  and  $\mathbf{B}$  is proportional to  $\mathbf{H}$

$$\mathbf{D} = \varepsilon \mathbf{E} \quad \text{and} \quad \mathbf{B} = \mu \mathbf{H}$$

with coefficients  $\varepsilon = \varepsilon(\mathbf{x})$  (electric permittivity) and  $\mu = \mu(\mathbf{x})$  (magnetic permeability) depending on the material property at  $\mathbf{x}$ .

Material coefficients  $\varepsilon$  and  $\mu$  can be matrix valued (anisotropic materials).

We consider here isotropic materials for which  $\varepsilon$  and  $\mu$  are scalar.

Particular materials

- **Vacuum** (or free space):  $\varepsilon = \varepsilon_0$  and  $\mu = \mu_0$ <sup>1</sup>
- **Dielectric** material:  $\varepsilon$  and  $\mu$  real,  $\varepsilon \geq \varepsilon_0$  and  $\mu \geq \mu_0$  for classical materials, possibly **negative for metamaterials**.
- **Conducting** material:  $\mu \geq \mu_0$  real and  $\varepsilon$  complex valued, with  $\text{Im } \varepsilon = \sigma \omega^{-1}$  where  $\sigma$  is the conductivity.

Globally in  $\mathbb{R}^3$ ,  $\varepsilon$  and  $\mu$  are **piecewise constant** depending on which material occupies the space at each point.

---

<sup>1</sup>  $\varepsilon_0 = 8.854 \times 10^{-12} \text{ Fm}^{-1}$  and  $\mu_0 = 4\pi \times 10^{-7} \text{ Hm}^{-1}$ . Speed of light  $c = (\varepsilon_0 \mu_0)^{-1/2}$ .

## Time harmonic Maxwell equations with constitutive laws

Putting all together we obtain

$$\mathbf{curl} \mathbf{E} - i\omega\mu\mathbf{H} = 0 \quad (3a)$$

$$\operatorname{div} \varepsilon\mathbf{E} = \rho \quad (3b)$$

$$\mathbf{curl} \mathbf{H} + i\omega\varepsilon\mathbf{E} = \mathbf{J} \quad (3c)$$

$$\operatorname{div} \mu\mathbf{H} = 0 \quad (3d)$$

Leaving aside the source problem we take  $\rho = 0$  and  $\mathbf{J} = 0$ :

$$\mathbf{curl} \mathbf{E} - i\omega\mu\mathbf{H} = 0 \quad (4a)$$

$$\operatorname{div} \varepsilon\mathbf{E} = 0 \quad (4b)$$

$$\mathbf{curl} \mathbf{H} + i\omega\varepsilon\mathbf{E} = 0 \quad (4c)$$

$$\operatorname{div} \mu\mathbf{H} = 0 \quad (4d)$$

The problem is to find triples  $(\omega, \mathbf{E}, \mathbf{H})$  with  $\omega \in \mathbb{C}$ , and  $(\mathbf{E}, \mathbf{H}) \neq (0, 0)$  in **admissible function spaces**

- In  $\mathbb{R}^3$ , this is the problem of finding **scattering resonances**. Suitable radiation conditions at infinity have to be imposed. In general  $\operatorname{Im} \omega < 0$ .
- In bounded domains, combined with suitable boundary conditions, this is the problem of finding **cavity resonances**. In general  $\omega \in \mathbb{R}$ .

## The cavity problem

An **electromagnetic cavity**  $\Omega$  is a bounded region of  $\mathbb{R}^3$  that is isolated from an electromagnetic point of view from the outside region  $\mathbb{R}^3 \setminus \Omega$ .

This is an idealization of a **Faraday cage** for which we consider that  $\Omega$  is surrounded by a **layer of infinite conductivity**  $\sigma$ . Then the electric field  $\mathbf{E}$  is zero outside  $\Omega$  and this causes the boundary condition

$$\mathbf{E} \times \mathbf{n} = 0 \quad \text{on} \quad \partial\Omega \quad (\text{the tangential component of } \mathbf{E} \text{ is } 0) \quad (5)$$

Here  $\mathbf{n}$  is the unitary outward normal field to  $\partial\Omega$ .

This can be rigorously proved by setting Maxwell equation in a region containing  $\Omega$  and its surrounding conductive medium and let  $\sigma$  tend to infinity. Going to this limit exhibits the skin effect / *effet de peau* / in conductive media.

# Outline

- 1 Notations
- 2 Maxwell equations
- 3 Variational formulation for cavity problem**

## Elimination of magnetic field

Recall equations

$$\mathbf{curl} \mathbf{E} - i\omega\mu\mathbf{H} = 0 \quad \text{in } \Omega \quad (6a)$$

$$\operatorname{div} \varepsilon\mathbf{E} = 0 \quad \text{in } \Omega \quad (6b)$$

$$\mathbf{curl} \mathbf{H} + i\omega\varepsilon\mathbf{E} = 0 \quad \text{in } \Omega \quad (6c)$$

$$\operatorname{div} \mu\mathbf{H} = 0 \quad \text{in } \Omega \quad (6d)$$

$$\mathbf{E} \times \mathbf{n} = 0 \quad \text{on } \partial\Omega \quad (6e)$$

Using (6a) it is **tempting to eliminate  $\mathbf{H}$**  by writing:  $i\omega\mathbf{H} = \frac{1}{\mu} \mathbf{curl} \mathbf{E}$  which yields, **formally** with (6c)

$$\mathbf{curl} \frac{1}{\mu} \mathbf{curl} \mathbf{E} - \omega^2 \varepsilon \mathbf{E} = 0 \quad (7)$$

Most frequently, one finds (7) in the literature, followed by an integration by parts to find a variational formulation.

We will rather start from the system (6) to find directly the variational formulation, which allows to find variational spaces without doubt.

## The space $H(\mathbf{curl}; \Omega)$

Assume that  $\mathbf{E} \in L^2(\Omega)^3$  and  $\mathbf{H} \in L^2(\Omega)^3$ . Then (6c) and (6a) yields

$$\mathbf{curl} \mathbf{E} \in L^2(\Omega)^3 \quad \text{and} \quad \mathbf{curl} \mathbf{H} \in L^2(\Omega)^3$$

This leads to introduce the space

$$H(\mathbf{curl}; \Omega) = \{ \mathbf{U} \in L^2(\Omega)^3, \quad \mathbf{curl} \mathbf{U} \in L^2(\Omega)^3 \}$$

### Lemma [Girault-Raviart, 86]

Let  $\Omega$  be a bounded Lipschitz domain<sup>a</sup>. Then  $\mathcal{C}^\infty(\bar{\Omega})^3$  is dense in  $H(\mathbf{curl}; \Omega)$ .

---

<sup>a</sup>A Lipschitz domain is a domain that is (after possible rotations) the epigraph of a Lipschitz function in the neighborhood of each of its boundary points.

Consequence: if  $\mathbf{U} \in H(\mathbf{curl}; \Omega)$ , the **tangential trace**  $\mathbf{U} \times \mathbf{n}$  makes sense in  $H^{-1/2}(\partial\Omega)^3$  thanks to the identity, valid for any  $\Phi \in H^1(\Omega)^3$ :

$$\langle \mathbf{U} \times \mathbf{n}, \Phi \rangle_{H^{-1/2}(\partial\Omega)^3 | H^1(\partial\Omega)^3} = \int_{\Omega} \mathbf{U} \cdot \mathbf{curl} \Phi \, dx - \int_{\Omega} \mathbf{curl} \mathbf{U} \cdot \Phi \, dx$$



## The space $H_0(\mathbf{curl}; \Omega)$

Then we can introduce the H-curl space with zero tangential traces

$$H_0(\mathbf{curl}; \Omega) = \{ \mathbf{U} \in H(\mathbf{curl}; \Omega), \quad \mathbf{u} \times \mathbf{n}|_{\partial\Omega} = \mathbf{0} \}$$

Then

### Lemma [Girault-Raviart, 86]

Let  $\Omega$  be a bounded Lipschitz domain. Then  $\mathcal{C}_0^\infty(\Omega)^3$  is dense in  $H_0(\mathbf{curl}; \Omega)$ .

And an important consequence

### Lemma

Let  $\Omega$  be a bounded Lipschitz domain. Then

$$\int_{\Omega} \mathbf{U} \cdot \mathbf{curl} \mathbf{V} \, dx = \int_{\Omega} \mathbf{curl} \mathbf{U} \cdot \mathbf{V} \, dx \quad \forall \mathbf{U} \in H_0(\mathbf{curl}; \Omega), \quad \forall \mathbf{V} \in H(\mathbf{curl}; \Omega).$$

## Towards variational formulation of cavity problem

Recall

$$\mathbf{curl} \mathbf{E} - i\omega\mu\mathbf{H} = 0 \quad \text{in } \Omega \quad (6a)$$

$$\mathbf{curl} \mathbf{H} + i\omega\varepsilon\mathbf{E} = 0 \quad \text{in } \Omega \quad (6c)$$

$$\mathbf{E} \times \mathbf{n} = 0 \quad \text{on } \partial\Omega \quad (6e)$$

If  $\mathbf{E} \in L^2(\Omega)^3$  and  $\mathbf{H} \in L^2(\Omega)^3$ , then  $\mathbf{E} \in H_0(\mathbf{curl}; \Omega)$  and  $\mathbf{H} \in H(\mathbf{curl}; \Omega)$ .

Pick a test function  $\mathbf{E}' \in H_0(\mathbf{curl}; \Omega)$ . Multiply (6a) by  $\mu^{-1}$  on the left, take the  $\cdot$  product with  $\mathbf{curl} \mathbf{E}'$  on the right, integrate over  $\Omega$

$$\int_{\Omega} \left( \mu^{-1} \mathbf{curl} \mathbf{E} \cdot \mathbf{curl} \mathbf{E}' - i\omega\mathbf{H} \cdot \mathbf{curl} \mathbf{E}' \right) dx = 0 \quad (6a')$$

Multiply (6c) by  $i\omega$ , take the  $\cdot$  product with  $\mathbf{E}'$  on the right, integrate over  $\Omega$

$$\int_{\Omega} \left( i\omega \mathbf{curl} \mathbf{H} \cdot \mathbf{E}' - \omega^2\varepsilon \mathbf{E} \cdot \mathbf{E}' \right) dx = 0 \quad (6c')$$

Add (6a') and (6c'), use the Lemma on previous slide and obtain

$$\int_{\Omega} \left( \mu^{-1} \mathbf{curl} \mathbf{E} \cdot \mathbf{curl} \mathbf{E}' - \omega^2\varepsilon \mathbf{E} \cdot \mathbf{E}' \right) dx = 0$$

# Electric spectral problem

## Definition

Let  $\Omega$  be a bounded Lipschitz domain. The **electric spectral problem** is to find pairs  $(\omega, \mathbf{E})$  with non-zero  $\mathbf{E} \in H_0(\mathbf{curl}; \Omega)$ , such that

$$\int_{\Omega} \left( \mu^{-1} \mathbf{curl} \mathbf{E} \cdot \mathbf{curl} \mathbf{E}' - \omega^2 \varepsilon \mathbf{E} \cdot \mathbf{E}' \right) d\mathbf{x} = 0 \quad \forall \mathbf{E}' \in H_0(\mathbf{curl}; \Omega) \quad (8)$$

Many questions arise

- 1 Can we find solutions?
- 2 Do solutions correspond to solutions of the cavity problem?
- 3 Can we discretize (8) by Finite Element Method (Galerkin projection)

We address these questions on a simplified two-dimensional problem which

- 1 Encounters the same difficulties as the original 3D problem
- 2 Has solutions that can be alternatively deduced by solving a scalar equation.

## Part II

# Traps in Finite element discretization

# Outline

- 4 **Toy problem – Bench test**
- 5 Numerical test / *Rien ne va plus*

## From 3 to 2 dimensions

- Take  $\varepsilon$  and  $\mu$  constant equal to 1.
- Take as domain  $\Omega$  a 2-dim. polygon (straight sides).

To find the Maxwell cavity problem in  $\Omega$  in its TE (Transverse Electric) formulation we go back to the 3-dim. formulation, considered in  $\Omega \times \mathbb{R}$ :

$$\mathbf{curl} \mathbf{E} - i\omega \mathbf{H} = 0 \quad \text{in} \quad \Omega \times \mathbb{R} \quad (6a)$$

$$\operatorname{div} \mathbf{E} = 0 \quad \text{in} \quad \Omega \times \mathbb{R} \quad (6b)$$

$$\mathbf{curl} \mathbf{H} + i\omega \mathbf{E} = 0 \quad \text{in} \quad \Omega \times \mathbb{R} \quad (6c)$$

$$\operatorname{div} \mathbf{H} = 0 \quad \text{in} \quad \Omega \times \mathbb{R} \quad (6d)$$

$$\mathbf{E} \times \mathbf{n} = 0 \quad \text{on} \quad \partial\Omega \times \mathbb{R} \quad (6e)$$

and assume that

- $\mathbf{E}$  and  $\mathbf{H}$  are function of  $(x_1, x_2)$  only (no dependence in  $x_3$ )
- $E_3 = 0, H_1 = H_2 = 0$ , i.e.

$$\mathbf{E} = \begin{pmatrix} E_1 \\ E_2 \\ 0 \end{pmatrix} \quad \text{and} \quad \mathbf{H} = \begin{pmatrix} 0 \\ 0 \\ H_3 \end{pmatrix}$$

Note that (6d) is already satisfied. We obtain

... / ...

## The TE cavity problem

$$\partial_1 E_2 - \partial_2 E_1 - i\omega H_3 = 0 \quad \text{in } \Omega \quad (9a)$$

$$\partial_1 E_1 + \partial_2 E_2 = 0 \quad \text{in } \Omega \quad (9b)$$

$$\partial_2 H_3 + i\omega E_1 = 0 \quad \text{and} \quad -\partial_1 H_3 + i\omega E_2 = 0 \quad \text{in } \Omega \quad (9c)$$

$$E_1 n_2 - E_2 n_1 = 0 \quad \text{on } \partial\Omega \quad (9d)$$

Define the scalar curl (denoted  $\text{rot}$ ) in 2 dimensions as

$$\text{rot } \mathbf{U} = \partial_1 U_2 - \partial_2 U_1 \quad \text{for } \mathbf{U} = (U_1, U_2)$$

and the spaces  $H(\text{rot}; \Omega)$  and  $H_0(\text{rot}; \Omega)$  accordingly.

By the same method as in 3-dim. we find that  $\mathbf{U} = (E_1, E_2)$  is solution of the

### Electric Maxwell spectral problem in 2-dim.

Find pairs  $(\omega, \mathbf{U})$  with non-zero  $\mathbf{U} \in H_0(\text{rot}; \Omega)$ , such that

$$\int_{\Omega} \left( \text{rot } \mathbf{U} \text{ rot } \mathbf{U}' - \omega^2 \mathbf{U} \cdot \mathbf{U}' \right) d\mathbf{x} = 0 \quad \forall \mathbf{U}' \in H_0(\text{rot}; \Omega) \quad (10)$$

Observe that (9c) implies  $\partial_1 H_3$  and  $\partial_2 H_3$  are in  $L^2(\Omega)$ . Hence  $H_3 \in H^1(\Omega)$ . We find:

### Neumann spectral problem

Find pairs  $(\omega, H_3)$  with non-zero  $H_3 \in H^1(\Omega)$ , such that

$$\int_{\Omega} \left( \nabla H_3 \cdot \nabla H' - \omega^2 H_3 H' \right) d\mathbf{x} = 0 \quad \forall H' \in H^1(\Omega) \quad (11)$$

# The electric Maxwell spectral problem (rot-rot eigenmodes)

## Proposition 1

Let  $\Omega$  be a 2-dim. simply connected Lipschitz domain.

Let  $(\omega, \mathbf{U}) \in \mathbb{C} \times H_0(\text{rot}; \Omega)$  be a solution of

$$(*) \quad \int_{\Omega} \left( \text{rot } \mathbf{U} \text{ rot } \mathbf{U}' - \omega^2 \mathbf{U} \cdot \mathbf{U}' \right) d\mathbf{x} = 0 \quad \forall \mathbf{U}' \in H_0(\text{rot}; \Omega)$$

1 If  $\omega = 0$ , then exists a scalar potential  $\varphi$  such that

$$\varphi \in H_0^1(\Omega) \quad \text{and} \quad \nabla \varphi = \mathbf{U}$$

**Conversely**, if  $\varphi \in H_0^1(\Omega)$ , then  $(0, \nabla \varphi)$  solves  $(*)$ .

2 If  $\omega \neq 0$ , then  $\text{div } \mathbf{U} = 0$  and exists a scalar potential<sup>a</sup>  $\psi \in H^1(\Omega)$  s. t.

$$\psi \in H^1(\Omega) \quad \text{and} \quad \overrightarrow{\text{rot}} \psi = \mathbf{U}$$

and  $(\omega^2, \psi)$  is an eigenpair of the Neumann problem

$$(**) \quad \int_{\Omega} \left( \nabla \psi \cdot \nabla \psi' - \omega^2 \psi \psi' \right) d\mathbf{x} = 0 \quad \forall \psi' \in H^1(\Omega)$$

**Conversely**, if  $(\omega^2, \psi)$  is an eigenpair  $(**)$ , then  $(\omega, \overrightarrow{\text{rot}} \psi)$  solves  $(*)$ .

<sup>a</sup>  $\overrightarrow{\text{rot}} \psi$  is the vector curl in 2-dim. :  $\overrightarrow{\text{rot}} \psi = (\partial_2 \psi, -\partial_1 \psi)^\perp$



# Proof

- 1 If  $\omega = 0$ , then  $\text{rot } \mathbf{U} = 0$ .
- As  $\Omega$  is simply connected, there exists a potential  $\varphi$  such that  $\nabla\varphi = \mathbf{U}$ .
  - Since  $\mathbf{U} \times \mathbf{n} = 0$  on  $\partial\Omega$ , then  $\varphi$  is constant on  $\partial\Omega$ .
  - The simple connectedness implies that  $\partial\Omega$  has one component, so  $\varphi$  can be chosen in  $H_0^1(\Omega)$ .
- 2 If  $\omega \neq 0$ , choose as test function  $\mathbf{U}' = \nabla\varphi'$ , with  $\varphi' \in H_0^1(\Omega)$ . Then  $(*) \Rightarrow$

$$\int_{\Omega} \mathbf{U} \cdot \nabla\varphi' \, d\mathbf{x} = 0 \quad \forall \varphi' \in H_0^1(\Omega)$$

Therefore, in the sense of duality

$$\langle \text{div } \mathbf{U}, \varphi' \rangle_{H^{-1}(\Omega) | H_0^1(\Omega)} = 0 \quad \forall \varphi' \in H_0^1(\Omega)$$

Hence  $\text{div } \mathbf{U} = 0$ . This implies the existence of a scalar potential  $\psi$  s.t.  $\overrightarrow{\text{rot}} \psi = \mathbf{U}$ . As

$$\overrightarrow{\text{rot}} \overrightarrow{\text{rot}} \psi = -\Delta\psi \quad \text{and} \quad \overrightarrow{\text{rot}} \psi \cdot \overrightarrow{\text{rot}} \psi' = \nabla\psi \cdot \nabla\psi'$$

$$\mathbf{U} \in H_0(\text{rot}; \Omega) \iff \psi \in \mathbf{D}(\Delta^{\text{Neu}}; \Omega) := \{v \in H^1(\Omega), \Delta v \in L^2(\Omega) \text{ \& } \partial_n \psi|_{\partial\Omega} = 0\}$$

$(*)$  implies  $\psi \in \mathbf{D}(\Delta^{\text{Neu}}; \Omega)$

$$(***) \quad \int_{\Omega} \left( \Delta\psi \Delta\psi' - \omega^2 \nabla\psi \cdot \nabla\psi' \right) d\mathbf{x} = 0 \quad \forall \psi' \in \mathbf{D}(\Delta^{\text{Neu}}; \Omega)$$

## End of proof

Integrating by parts (\* \* \*) implies

$$\int_{\Omega} \left( \Delta \psi \Delta \psi' + \omega^2 \psi \Delta \psi' \right) d\mathbf{x} = 0 \quad \forall \psi' \in D(\Delta^{\text{Neu}}; \Omega)$$

i.e.

$$\int_{\Omega} \left( \Delta \psi + \omega^2 \psi \right) \Delta \psi' d\mathbf{x} = 0 \quad \forall \psi' \in D(\Delta^{\text{Neu}}; \Omega)$$

Denote by  $L^2_{\circ}(\Omega)$  the space of functions  $L^2(\Omega)$  orthogonal to constants on  $\Omega$

$$L^2_{\circ}(\Omega) = \left\{ v \in L^2(\Omega), \int_{\Omega} v d\mathbf{x} = 0 \right\}$$

Now, we can choose  $\psi \in L^2_{\circ}(\Omega)$ , and still have  $\overrightarrow{\text{rot}} \psi = \mathbf{U}$ . The operator  $\Delta^{\text{Neu}}$

$$\Delta^{\text{Neu}} : D(\Delta^{\text{Neu}}; \Omega) \longrightarrow L^2_{\circ}(\Omega) \quad \text{is onto / surjectif}$$

Hence

$$\int_{\Omega} \left( \Delta \psi + \omega^2 \psi \right) v d\mathbf{x} = 0 \quad \forall v \in L^2_{\circ}(\Omega)$$

and, since  $\Delta \psi + \omega^2 \psi$  belongs to  $L^2_{\circ}(\Omega)$

$$\Delta \psi + \omega^2 \psi = 0$$

Finishing the proof is now easy.

# The TE cavity problem versus the rot-rot spectral problem

## Corollary

Let  $\Omega$  be a 2-dim. simply connected Lipschitz domain.  
The solutions  $(\omega, (E_1, E_2, H_3))$  of the TE cavity problem (9) are

- 1  $\omega = 0$  with  $E_1 = E_2 = 0$  and  $H_3$  non-zero constant.
- 2  $\omega \neq 0$  such that  $\omega^2$  is an eigenvalue of  $\Delta^{\text{Neu}}$ , the positive Laplace operator with Neumann conditions:  $\Delta^{\text{Neu}} = -\Delta$  with operator domain  $D(\Delta^{\text{Neu}}; \Omega)$ . Then

$$(E_1, E_2, H_3) = (\overrightarrow{\text{rot}} \psi, -i\omega\psi)$$

with  $\psi$  eigenvector of  $\Delta^{\text{Neu}}$  associated with  $\omega^2$ .

## Remarks on 3-dim. domains

If  $\Omega$  is a 3-dim. simply connected Lipschitz domain, the solutions of

$$(*) \quad \int_{\Omega} (\mathbf{curl} \mathbf{U} \cdot \mathbf{curl} \mathbf{U}' - \omega^2 \mathbf{U} \cdot \mathbf{U}') \, d\mathbf{x} = 0 \quad \forall \mathbf{U}' \in H_0(\mathbf{curl}; \Omega)$$

are related to the cavity problem in a similar way:

$$\omega = 0 \implies \mathbf{div} \mathbf{U} \neq 0 \quad \text{and} \quad \omega \neq 0 \implies \mathbf{div} \mathbf{U} = 0$$

and the solutions of the cavity problem can be deduced from those of (\*) when  $\omega \neq 0$ .

But, in 3-dim. there is no scalar potential in general.

The 2-dim. serves as a bench test / *banc d'essai* / for 3-dim.

# Outline

- 4 Toy problem – Bench test
- 5 Numerical test / *Rien ne va plus*

# The square

Consider  $\Omega = (0, \pi) \times (0, \pi)$ .

By separation of variables, we find that the eigenpairs of  $\Delta^{\text{Neu}}$  are

$$\begin{cases} \omega^2 = j_1^2 + j_2^2 \\ \psi(x_1, x_2) = \cos(j_1 x_1) \cos(j_2 x_2) \end{cases} \quad \text{for any integers } j_1, j_2 \in \{0, 1, 2, \dots\}$$

Using Proposition 1, this implies that the solutions of the electric Maxwell spectral problem

$$(*) \quad \int_{\Omega} \operatorname{rot} \mathbf{U} \operatorname{rot} \mathbf{U}' \, d\mathbf{x} = \omega^2 \int_{\Omega} \mathbf{U} \cdot \mathbf{U}' \, d\mathbf{x} \quad \forall \mathbf{U}' \in H_0(\operatorname{rot}; \Omega)$$

correspond to eigenvalues  $\omega^2$  equal to

- 1 0 (with infinite multiplicity)
- 2 1, 1, 2, 4, 4, 5, 5, 8, 9, 9, 10, 10, 13, 13, ...  
(with repetition according to multiplicity)

# Finite element method

- a** Let  $a$  be bilinear (or sesquilinear) form well defined on a product space  $V \times V$

$$a(\mathbf{u}, \mathbf{v}) = \sum_i \sum_j \sum_{|\alpha| \leq 1} \sum_{|\beta| \leq 1} \int_{\Omega} \left( a_{\alpha\beta} \partial^{\alpha} u_i \partial^{\beta} v_j \right) d\mathbf{x}$$

**Spectral problem associated with  $a$ :** Find pairs  $(\lambda, \mathbf{u})$ , with  $0 \neq \mathbf{u} \in V$  s. t.

$$(\dagger) \quad a(\mathbf{u}, \mathbf{v}) = \lambda \langle \mathbf{u}, \mathbf{v} \rangle_{L^2(\Omega) | L^2(\Omega)} \quad \forall \mathbf{v} \in V$$

- b** Let  $\tilde{V}$  be a finite dimensional subspace of  $V$ .


**Galerkin projection of problem  $(\dagger)$ :** Find pairs  $(\tilde{\lambda}, \tilde{\mathbf{u}})$ , with  $0 \neq \tilde{\mathbf{u}} \in \tilde{V}$  s. t.

$$(\ddagger) \quad a(\tilde{\mathbf{u}}, \tilde{\mathbf{v}}) = \tilde{\lambda} \langle \tilde{\mathbf{u}}, \tilde{\mathbf{v}} \rangle_{L^2(\Omega) | L^2(\Omega)} \quad \forall \tilde{\mathbf{v}} \in \tilde{V}$$

- b** The **Finite Element Method [FEM]** consists in constructing and implementing suitable spaces  $\tilde{V}$ . In general, they are based on a **mesh of  $\Omega$**  (subdivision into triangular or quadrilateral elements in 2-dim.) and piecewise (mapped-) **polynomials** in each element of the mesh.

**Analysis of FEM:** proving (or **disproving**) convergence when  $\dim \tilde{V} \rightarrow \infty$ .

# Let's go / On y va

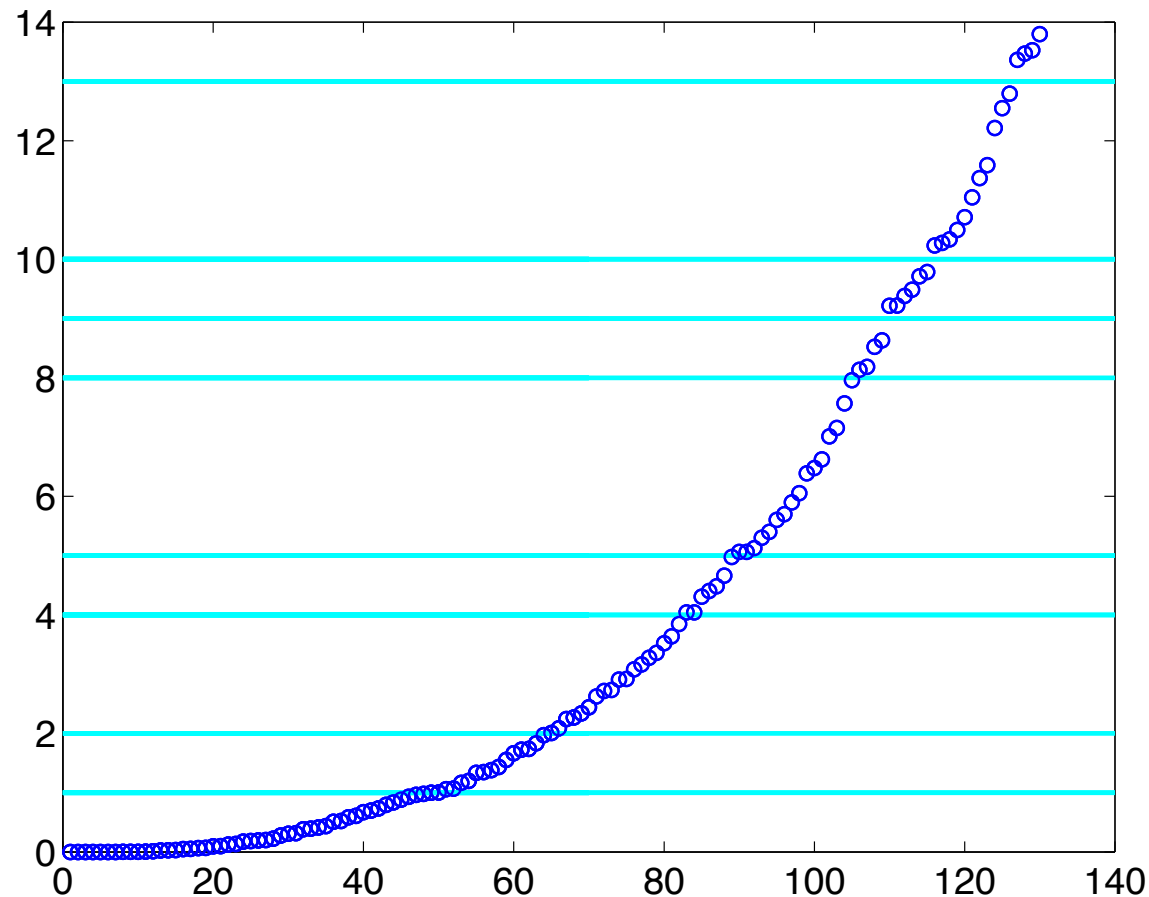


Triangular mesh  
 ~ 450 elements of degree 1

Sort computed eigenvalues  
 by increasing order

$$\tilde{\lambda}_1 \leq \tilde{\lambda}_2 \leq \dots$$

- Abscissa: rank of computed eigenvalue  $1 \leq n \leq 140$
- Ordinates: value of  $\tilde{\lambda}_n$
- Horizontal lines = exact values for  $\lambda_j$

## Another try / *Un autre essai*

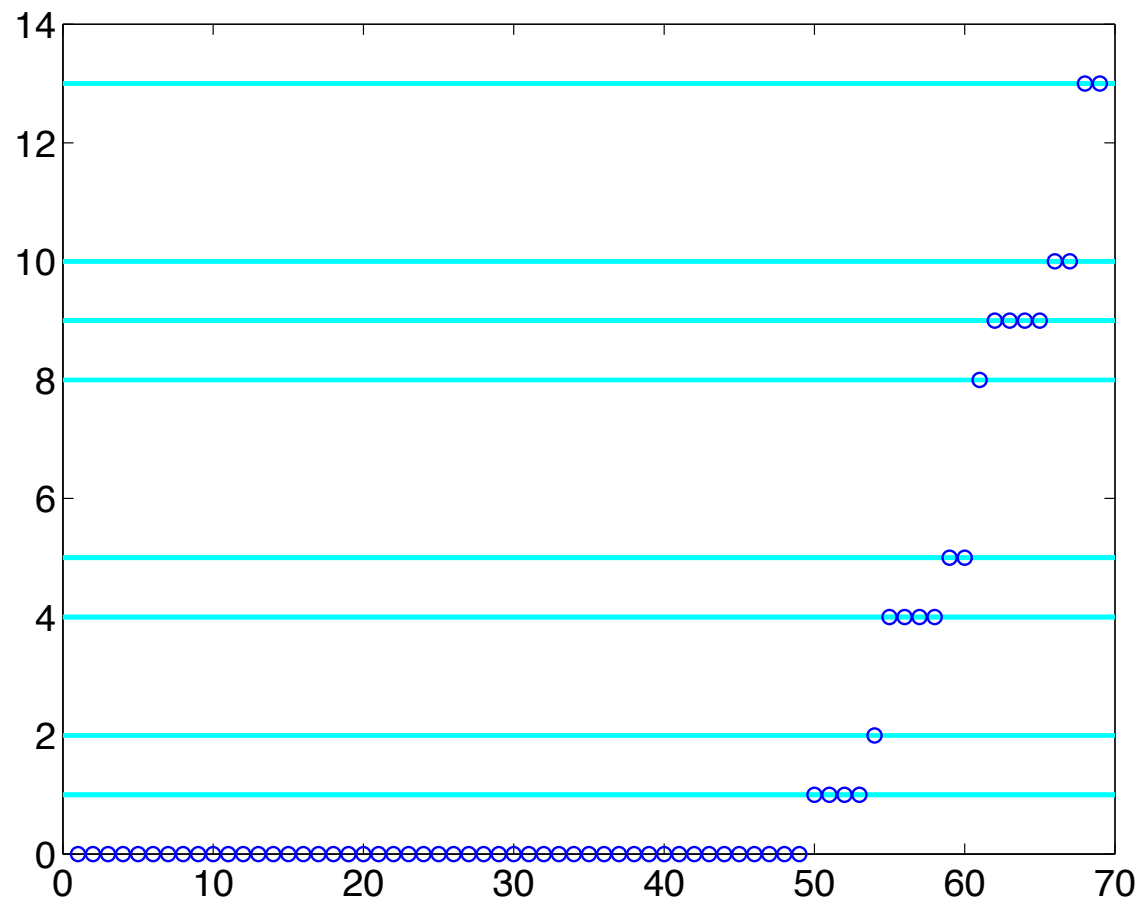

Mesh with one square element  
of degree 8 :

$$\tilde{\mathbf{u}} = (\tilde{u}_1, \tilde{u}_2)$$

with

$$\tilde{u}_1, \tilde{u}_2 \in \mathbb{Q}_8 = \mathbb{P}_8 \otimes \mathbb{P}_8$$

Sort computed eigenvalues  
by increasing order


$$\tilde{\lambda}_1 \leq \tilde{\lambda}_2 \leq \dots$$

*Il y a encore un problème*

- Abscissa: rank of computed eigenvalue  $1 \leq n \leq 70$
- Ordinates: value of  $\tilde{\lambda}_n$
- Horizontal lines = exact values for  $\lambda_j$



## Another try / *Un autre essai*

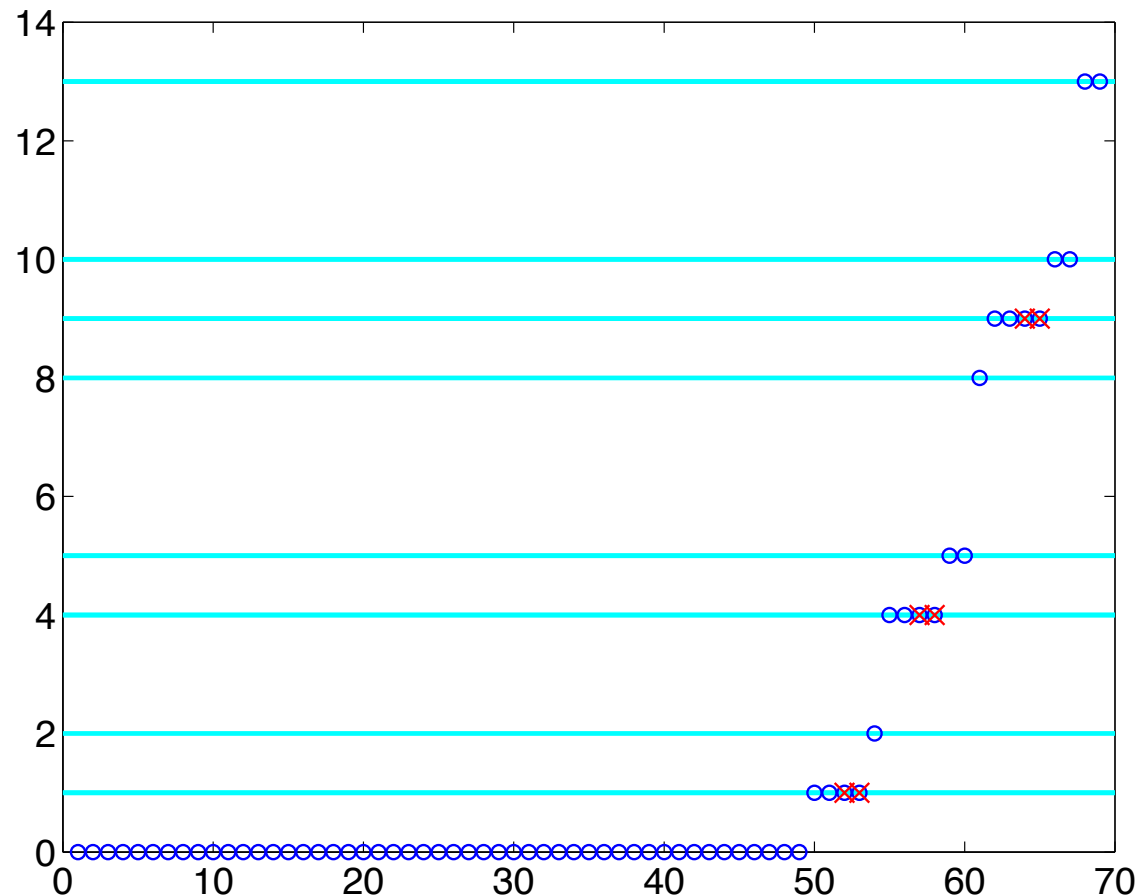

Mesh with one square element of degree 8 :

$$\tilde{\mathbf{u}} = (\tilde{u}_1, \tilde{u}_2)$$

with

$$\tilde{u}_1, \tilde{u}_2 \in \mathbb{Q}_8 = \mathbb{P}_8 \otimes \mathbb{P}_8$$


Sort computed eigenvalues by increasing order

$$\tilde{\lambda}_1 \leq \tilde{\lambda}_2 \leq \dots$$

*Il y a encore un problème*

- Abscissa: rank of computed eigenvalue  $1 \leq n \leq 70$
- Ordinates: value of  $\tilde{\lambda}_n$
- Horizontal lines = exact values for  $\lambda_j$

## Try something else (breaking identity between components)

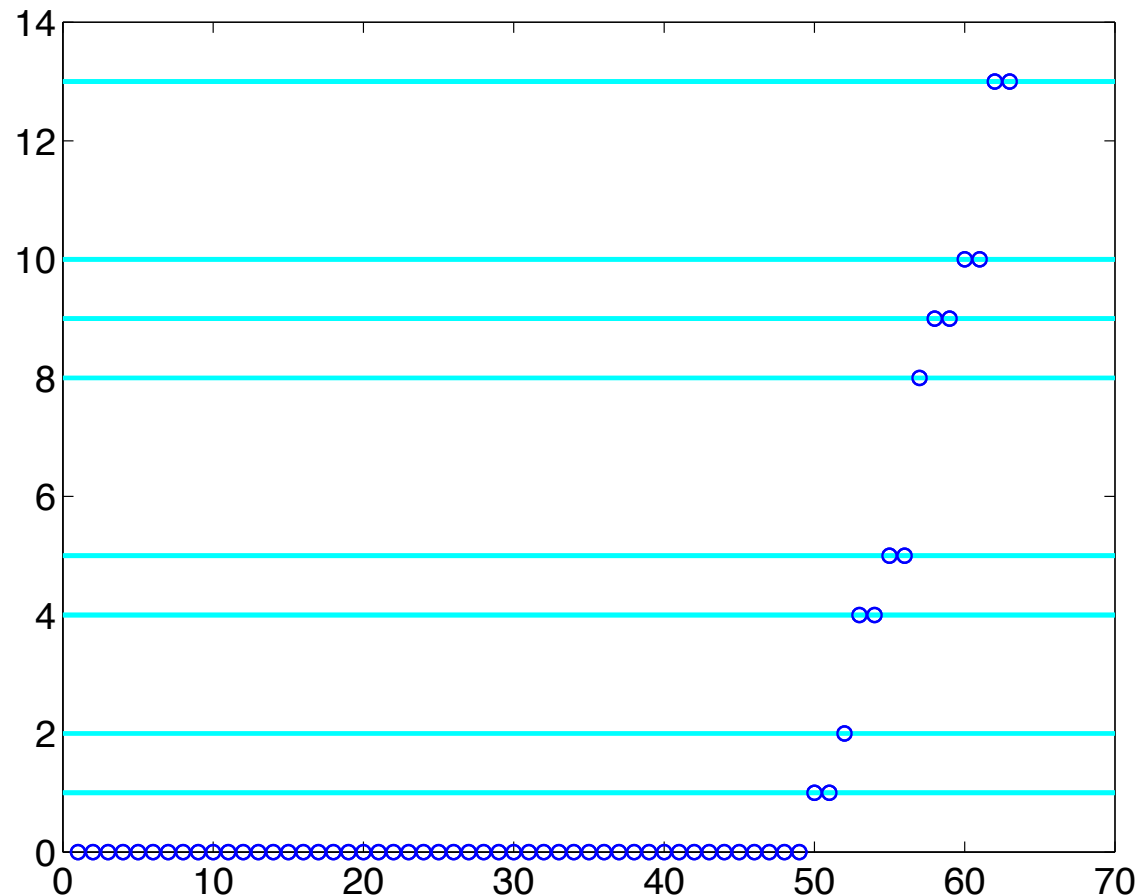

Mesh with one square element  
of mixed degrees 7&8 :

$$\tilde{\mathbf{u}} = (\tilde{u}_1, \tilde{u}_2)$$

with

$$\tilde{u}_1 \in \mathbb{P}_7 \otimes \mathbb{P}_8 \quad \tilde{u}_2 \in \mathbb{P}_8 \otimes \mathbb{P}_7$$

Sort computed eigenvalues  
by increasing order

$$\tilde{\lambda}_1 \leq \tilde{\lambda}_2 \leq \dots$$

*Il n'y a plus de problème*

This is an “edge element”  
of lecture by Martin.

- Abscissa: rank of computed eigenvalue  $1 \leq n \leq 70$
- Ordinates: value of  $\tilde{\lambda}_n$
- Horizontal lines = exact values for  $\lambda_j$